

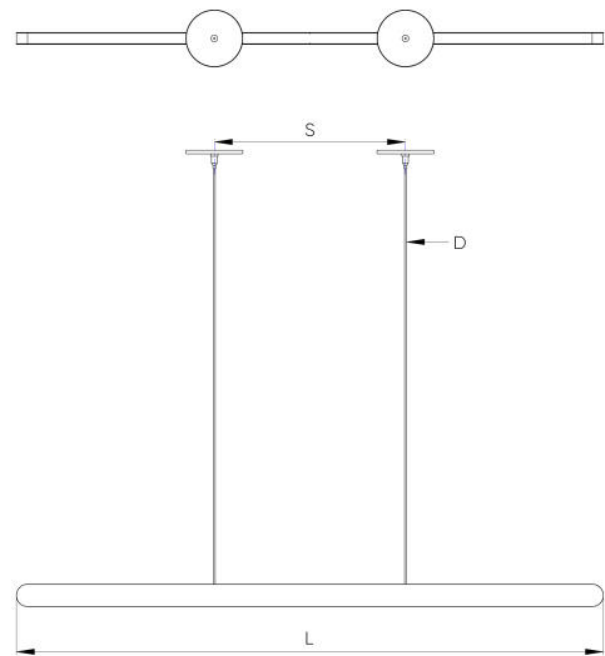


CN1 (Remote Drivers) - Direct & Direct/Indirect


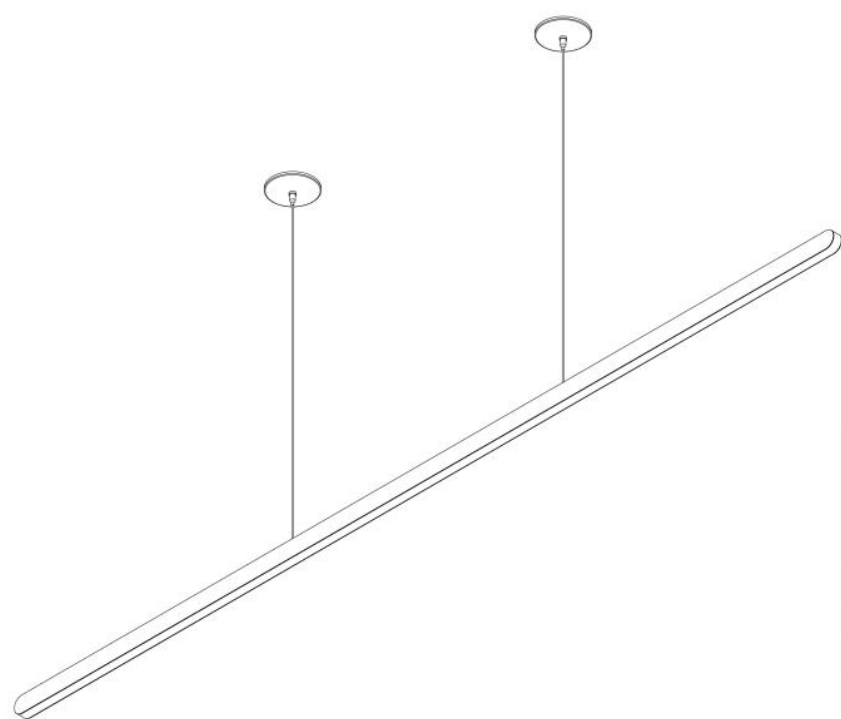


PROFILE DIMENSIONS





LUMINAIRE DIMENSIONS			
NOMINAL SIZE	S Distance Between Suspension Points	L Actual Luminaire Length	D Cluster of POS Cords per Susp. pt
2FT	8" [203mm]	29 $\frac{3}{8}''$ [747mm]	1
4FT	16" [406mm]	53 $\frac{3}{8}''$ [1357mm]	1
6FT	24" [610mm]	77 $\frac{3}{8}''$ [1966mm]	1
8FT	32" [813mm]	101 $\frac{3}{8}''$ [2576mm]	1
10FT	40" [1016mm]	125 $\frac{3}{8}''$ [3185mm]	1
12FT	48" [1219mm]	149 $\frac{3}{8}''$ [3795mm]	1

CN2 (Remote Drivers) - Direct & Direct/Indirect

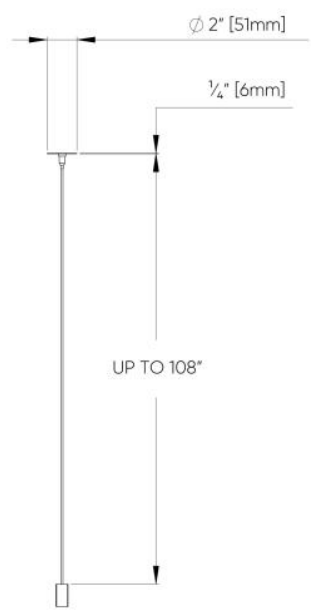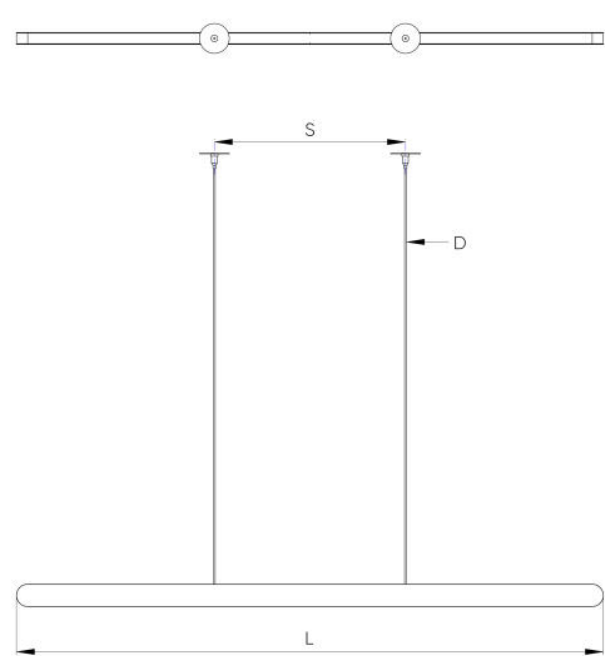


PROFILE DIMENSIONS

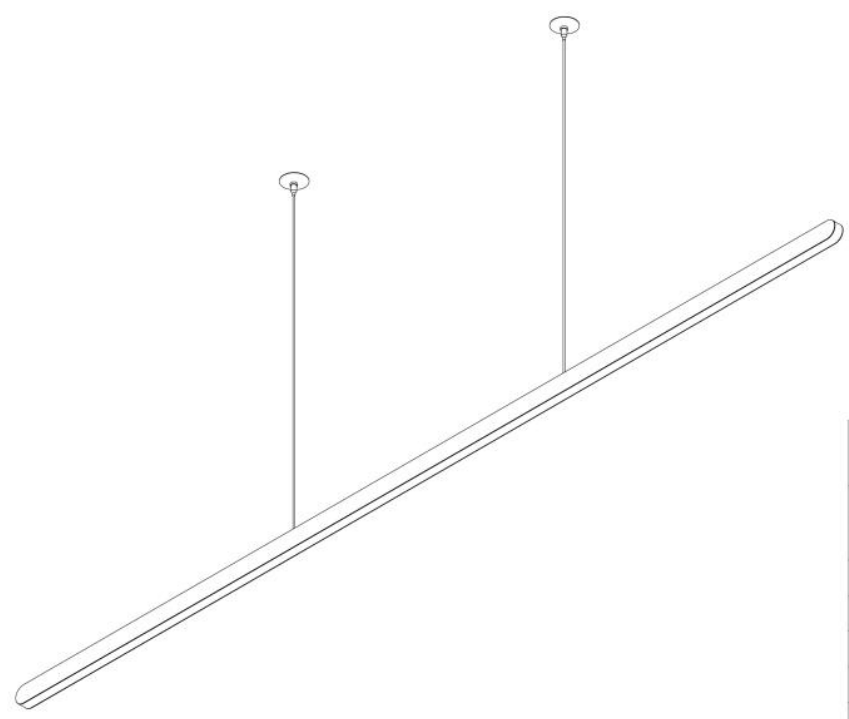



LUMINAIRE DIMENSIONS			
NOMINAL SIZE	S Distance Between Suspension Points	L Actual Luminaire Length	D Cluster of POS Cords per Susp. pt
2FT	8" [203mm]	29 3/8" [747mm]	1
4FT	16" [406mm]	53 3/8" [1357mm]	1
6FT	24" [610mm]	77 3/8" [1966mm]	1
8FT	32" [813mm]	101 3/8" [2576mm]	1
10FT	40" [1016mm]	125 3/8" [3185mm]	1
*12FT	48" [1219mm]	149 3/8" [3795mm]	1

CN3 (Recessed Drivers) - Direct & Direct/Indirect

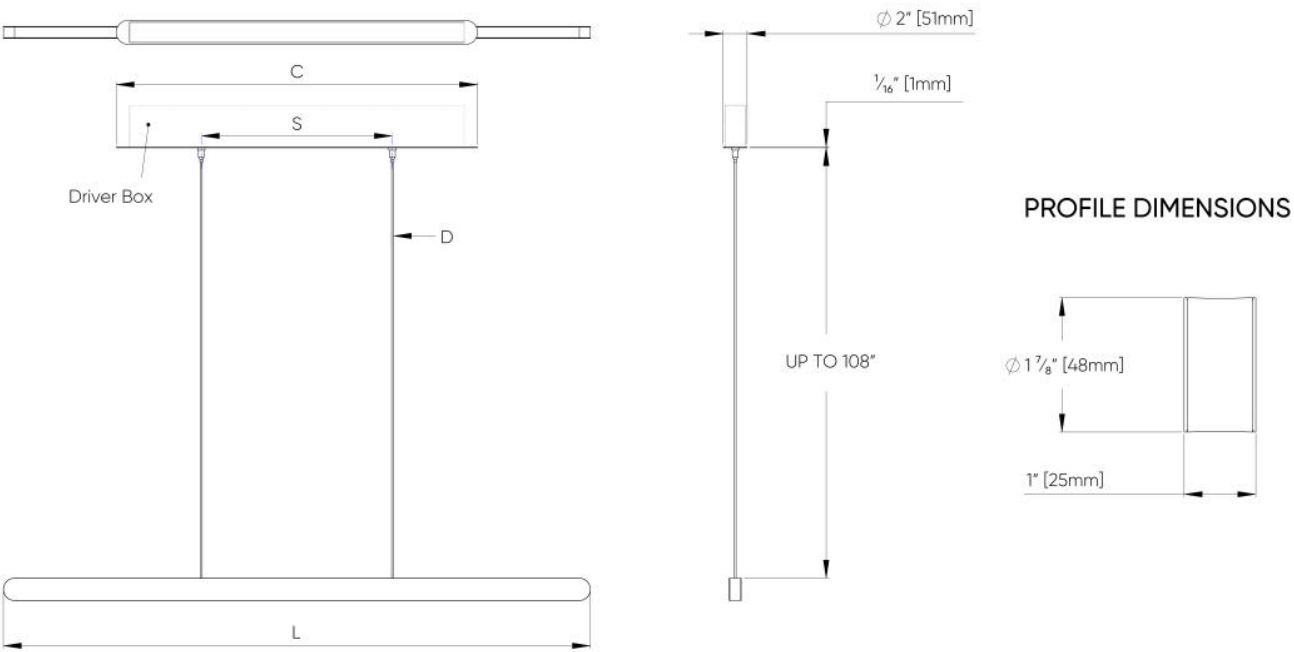

PROFILE DIMENSIONS

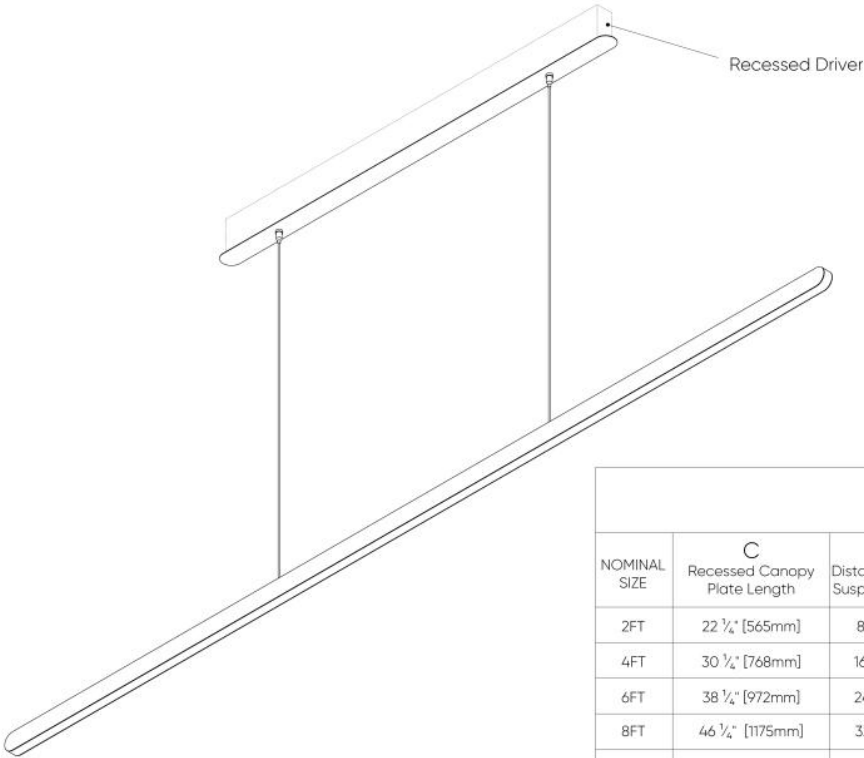

Recessed Driver

LUMINAIRE DIMENSIONS

NOMINAL SIZE	C Recessed Canopy Plate Length	S Distance Between Suspension Points	L Actual Luminaire Length	D Cluster of POS Cords per Susp. pt	Recommended Ceiling Cutouts
2FT	22 $\frac{1}{4}"$ [565mm]	8" [203mm]	29 $\frac{3}{8}"$ [747mm]	1	1 $\frac{5}{8}"$ * 20 $\frac{1}{8}"$
4FT	30 $\frac{1}{4}"$ [768mm]	16" [406mm]	53 $\frac{3}{8}"$ [1357mm]	1	1 $\frac{5}{8}"$ * 28 $\frac{1}{8}"$
6FT	38 $\frac{1}{4}"$ [972mm]	24" [610mm]	77 $\frac{3}{8}"$ [1966mm]	1	1 $\frac{5}{8}"$ * 36 $\frac{1}{8}"$
8FT	46 $\frac{1}{4}"$ [1175mm]	32" [813mm]	101 $\frac{3}{8}"$ [2576mm]	1	1 $\frac{5}{8}"$ * 44 $\frac{1}{8}"$
10FT	54 $\frac{1}{4}"$ [1378mm]	40" [1016mm]	125 $\frac{3}{8}"$ [3185mm]	1	1 $\frac{5}{8}"$ * 50 $\frac{1}{8}"$
12FT	62 $\frac{1}{4}"$ [1581mm]	48" [1219mm]	149 $\frac{3}{8}"$ [3795mm]	1	1 $\frac{5}{8}"$ * 58 $\frac{1}{8}"$