






MICRO SQUIGGLE™


FULL SPECIFICATION SHEET

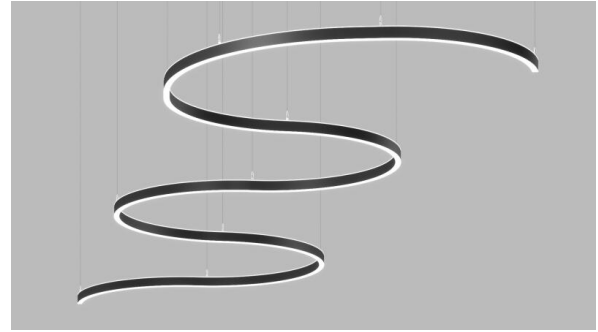

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

MICRO SQUIGGLE adapts to your space with fluid versatility. This highly customizable curvilinear lighting system features a sleek 1" aperture and integrates seamlessly with architectural design. With a variety of curves, straight sections, and joiners, it allows you to create unique configurations that wrap around structural elements, enhancing the space's architectural expression while meeting your specific design needs. **MICRO SQUIGGLE's** multi-tiered form enhances depth and integrates effortlessly into any space. Designed for visual impact, **MICRO SQUIGGLE's** sinuous lines bring sculptural lighting into focus. Its soft, continuous glow enriches the atmosphere with warmth and sophistication. As a versatile fixture, it is available in direct-only or direct-indirect options. With its organic form and seamless glow, **MICRO SQUIGGLE** transforms the ceiling into a dynamic design element. Its curving silhouette enhances both aesthetics and functionality.


2 OPTICS & FEATURES




Suspended
Direct




Suspended
Direct/Indirect



Direct



Direct-indirect



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Steel and aluminum.

FINISH

Powder coated for standard finishes.

LENS

Protruding Lens 0.08" (2.1mm)

DRIVERS

Remote, HPF electronic drivers for 120-277V, 347V (EU-240V) dimming. Wire size 18 AWG – max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG – max distance 60' (18.3m), wire size 14 AWG – max distance 90' (27.4m). Drivers must be accessible after installation. Drivers are either remote mounted or integral to the canopy depending on the size of the fixture. For longer remote distances, consult factory.

MECHANICAL

Luminaires mount directly over J box (by others – North America only).

REMOTE EMERGENCY

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

L70 @25°C

> 60,000 hrs.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

POWER CABLE

Silver braided.

SUSPENSION

Steel cables.

CORNER RADIUS

Minimum corner radius is 6 inches

ELECTRICAL

Luminaires are pre-wired with a factory installed branch circuit wiring with quick connectors. Through wiring is used to connect individual luminaires.

POE

Squiggle can integrate into your data network via Power over Ethernet (PoE) connectivity.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI).

APPROVALS






Damp Rated.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS






FIXTURE FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured



Champagne
Metallic

CANOPY FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured



Champagne
Metallic

6 HOW TO ORDER

LUMINAIRE MQUG Pendant	DIRECTION DT1 Direct DT2 Direct/Indirect	SECTION TYPES SCA16 Curve 16" SCA30 Curve 30" SCA42 Curve 42" SCA48 Curve 48" SCA54 Curve 54" SCA72 Curve 72" SCB28 Straight 28" SCB36 Straight 36" SCB47 Straight 47" SCB72 Straight 72" SCB95 Straight 95" SCC01 Cross Section SCD01 Corner Section SCE01 T Section CST01 Custom Shape Required Select from one of the sections. Each section is to be ordered as a separate line item.	END CAP ENC00 Not required ENC_ _ End Cap
LUMENS (DIRECT) LPF017 175 lm/ft LPF026 260 lm/ft LPF035 350 lm/ft	LUMENS (INDIRECT) LPG000 Not required LPG017 175 lm/ft LPG026 260 lm/ft LPG035 350 lm/ft	CRI CR80 CRI 80+ CR90 CRI 90+	CCT (DIRECT) CTA27 2700K CTA30 3000K CTA35 3500K CTA40 4000K
CCT (INDIRECT) CTB00 Not required CTB27 2700K CTB30 3000K CTB35 3500K CTB40 4000K	VOLTAGE V1 120/277V V2 240V ¹ V3 347V ² V4 Low Voltage ³ ¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.	DIMMING DA01 0-10V Dimming 1.0% DA02 0-10V Dimming 0.1% ¹ DA20 DALI Dimming 0.1% ¹ DA21 DALI Dimming 1.0% ¹ DA45 PoE ³ ¹ Not available with V3. ² Not available in North America. ³ Available with V4 only.	SUSPENSION SS1 Vertical, Remote driver SS3 Vertical, Integral driver
FIXTURE FINISH FA01 White FA02 Black Metallic – Textured FA20 Silver Metallic – Textured FA25 Gold Metallic – Textured FA44 Midnight Blue Metallic – Textured FA45 Copper Metallic FA46 Charcoal Metallic – Textured FA47 Bronze Metallic – Textured FA52 Champagne Metallic	CANOPY FINISH CF01 White CF02 Black Metallic – Textured CF20 Silver Metallic – Textured CF25 Gold Metallic – Textured CF44 Midnight Blue Metallic – Textured CF45 Copper Metallic CF46 Charcoal Metallic – Textured CF47 Bronze Metallic – Textured CF52 Champagne Metallic	EMERGENCY SECTIONS E0 Not required E2 Emergency system – Remote ¹ ¹ Consult factory. Note: a drawing will be required at time of ordering to determine the required location of the emergency sections.	CIRCUITS CS1 Single circuit CS2 Dual circuit

7 TECHNICAL DATA

SECTION TYPES

Select from one of the sections. Each section is to be ordered as a separate line item.

Code	SCA16	SCA30	SCA42	SCA48	SCA54	SCA72
Section Type	Curved	Curved	Curved	Curved	Curved	Curved
Arc°	90°	90°	120°	120°	120°	90°
Radius	16"	30"	42"	48"	54"	72"
Length						
Code	SCB28	SCB36	SCB47	SCB72	SCB95	SCC01
Section Type	Straight	Straight	Straight	Straight	Straight	Cross
Arc°						
Radius						
Length	28"	36"	47"	72"	95"	23.5"
Code	SCD01	SCE01	CST01			
Section Type	Corner	T				
Arc°						
Radius						
Length	12"	35"				

8 PERFORMANCE DATA

Curved SCA 16	Lumens	Watts	LPW	Curved SCA 30	Lumens	Watts	LPW
LPF 017	350	5	70	LPF 017	675	10	70
LPF 026	550	8	68	LPF 026	1000	15	68
LPF 035	700	11	67	LPF 035	1350	20	67
Curved SCA 42	Lumens	Watts	LPW	Curved SCA 48	Lumens	Watts	LPW
LPF 017	1250	18	70	LPF 017	1400	20	70
LPF 026	1850	27	68	LPF 026	2125	31	68
LPF 035	2500	37	67	LPF 035	2850	42	67
Curved SCA 54	Lumens	Watts	LPW	Curved SCA 72	Lumens	Watts	LPW
LPF 017	1600	23	70	LPF 017	1600	23	70
LPF 026	2400	35	68	LPF 026	2400	35	68
LPF 035	3200	48	67	LPF 035	3200	48	67

Straight SCB 28	Lumens	Watts	LPW	Straight SCB 36	Lumens	Watts	LPW
LPF 017	400	6	70	LPF 017	500	7	70
LPF 026	600	9	68	LPF 026	775	11	68
LPF 035	800	12	67	LPF 035	1025	15	67


Straight SCB 47	Lumens	Watts	LPW	Straight SCB 72	Lumens	Watts	LPW
LPF 017	675	10	70	LPF 017	1025	15	70
LPF 026	1000	15	68	LPF 026	1550	23	68
LPF 035	1350	20	67	LPF 035	2050	31	67

Straight SCB 95	Lumens	Watts	LPW	Corner SCD 01	Lumens	Watts	LPW
LPF 017	1350	19	70	LPF 017	325	5	70
LPF 026	2025	30	68	LPF 026	500	7	68
LPF 035	2700	40	67	LPF 035	650	10	67

Cross SCC 01	Lumens	Watts	LPW	T Section SCE 01	Lumens	Watts	LPW
LPF 017	650	9	70	LPF 017	800	11	69
LPF 026	975	14	68	LPF 026	1175	17	68
LPF 035	1300	19	67	LPF 035	1575	23	67


9 TM-30 DATA

CCT 2700K

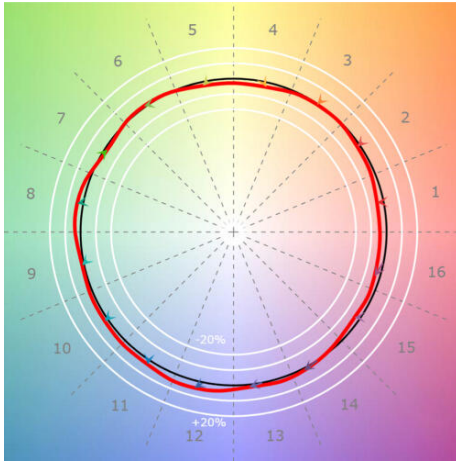


CRI(Ra)	94
CRI(R9)	58
TM30(Rf)	93
TM30(Rg)	99
Duv	0.0004

CCT 3000K

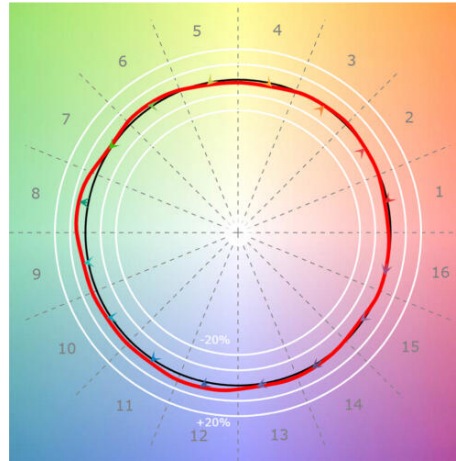


CRI(Ra)	94
CRI(R9)	75
TM30(Rf)	93
TM30(Rg)	102
Duv	-0.0001

CCT 3500K

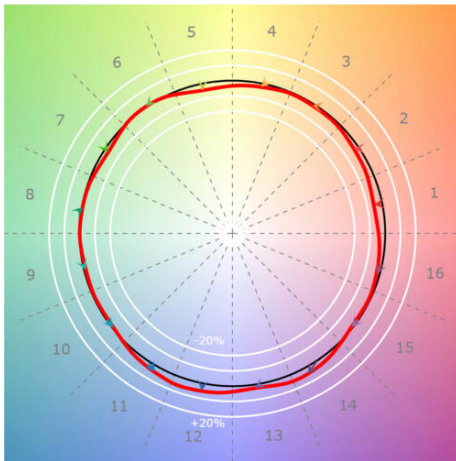

CRI(Ra)	94
CRI(R9)	53
TM30(Rf)	91
TM30(Rg)	98
Duv	0.0009


CCT 4000K

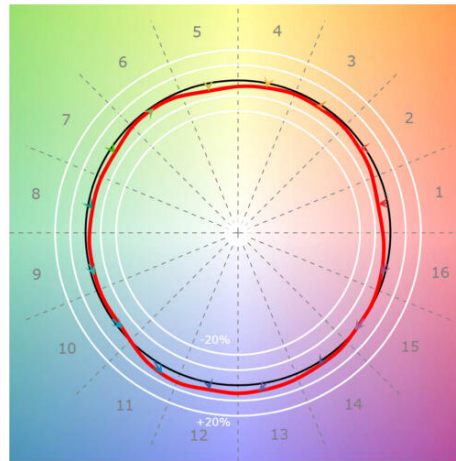


CRI(Ra)	92
CRI(R9)	50
TM30(Rf)	89
TM30(Rg)	97
Duv	0.0011

10 DIMENSIONAL DIAGRAMS


16" Radius

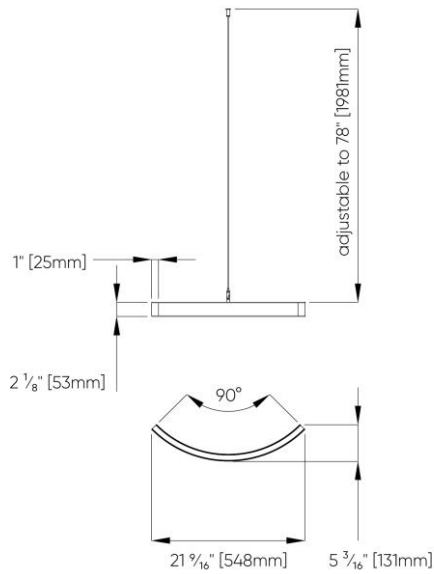

30" Radius

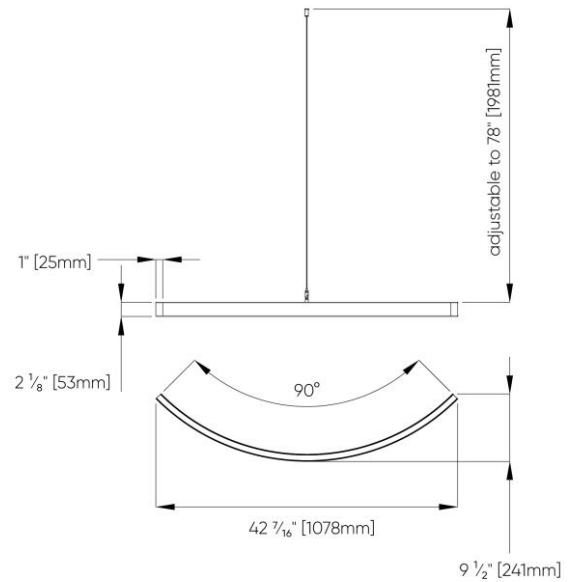


42" Radius

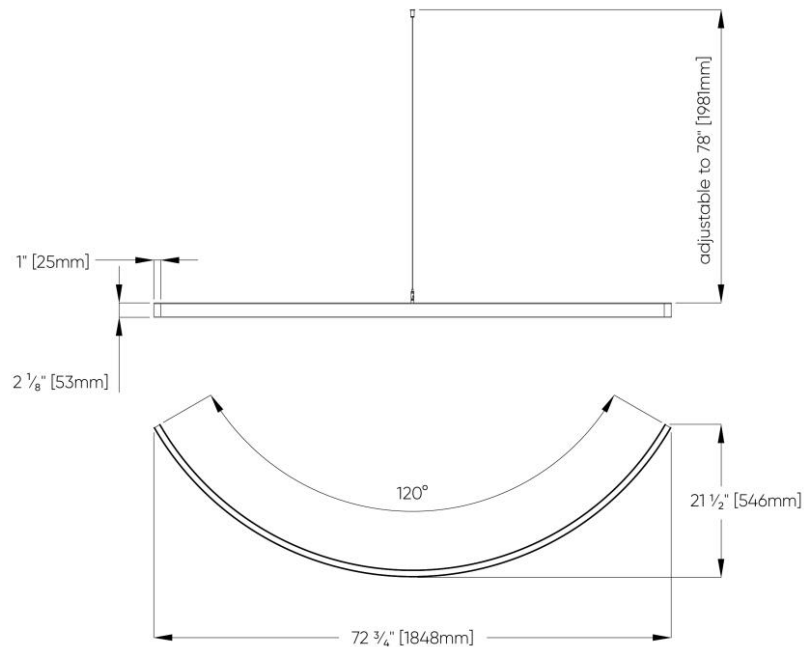


To determine the number of sections to be shipped, a final customer assembly drawing is required.
Custom shapes available.

48" Radius

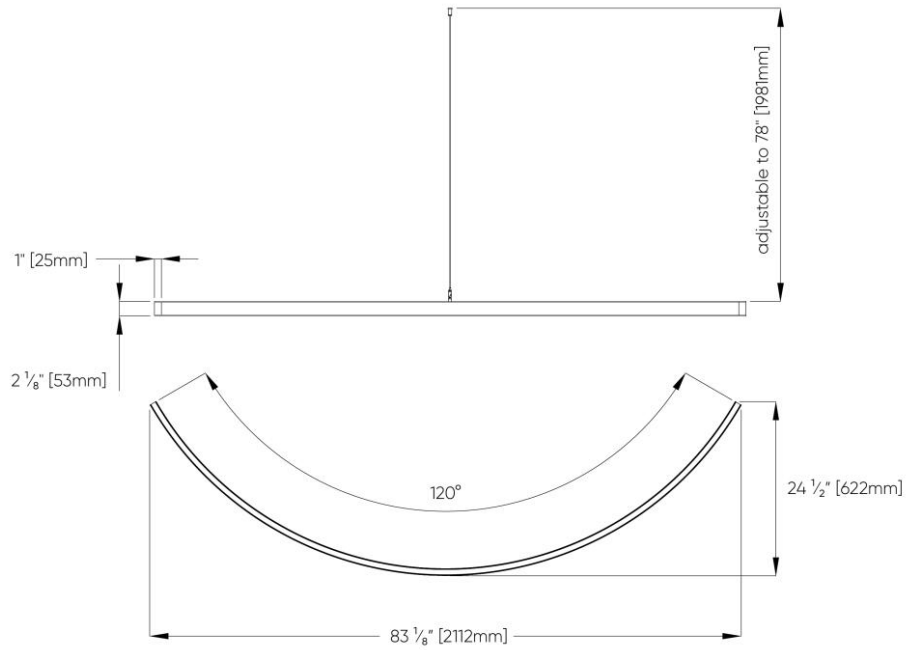


54" Radius

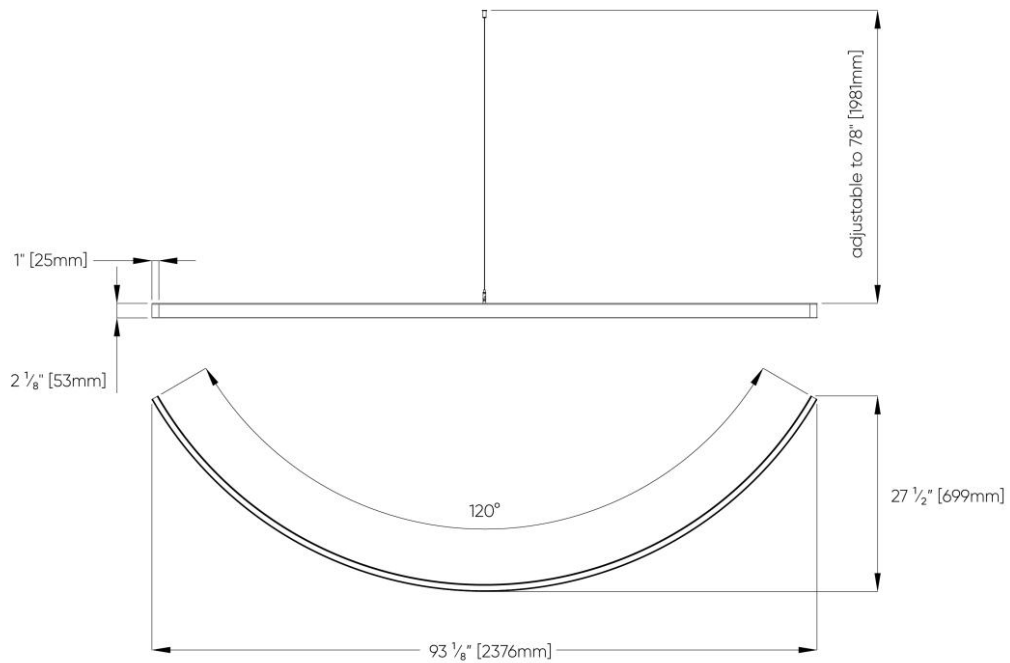


To determine the number of sections to be shipped, a final customer assembly drawing is required.
Custom shapes available.

72" Radius

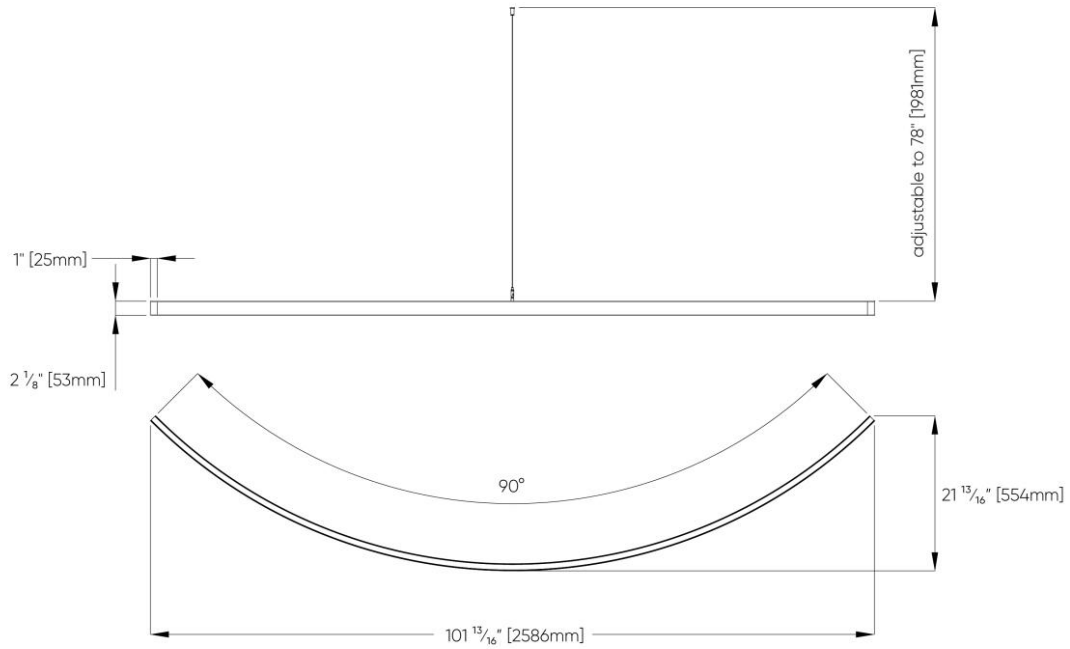


SS1

Vertical - Remote Driver

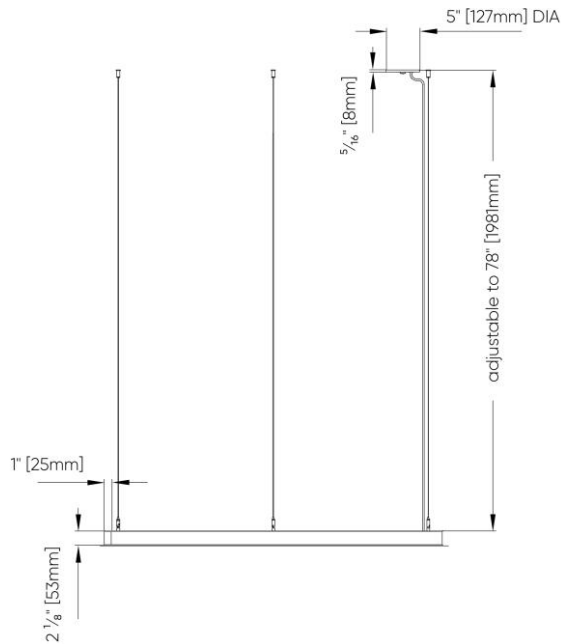


SS3

Vertical - Integral Driver

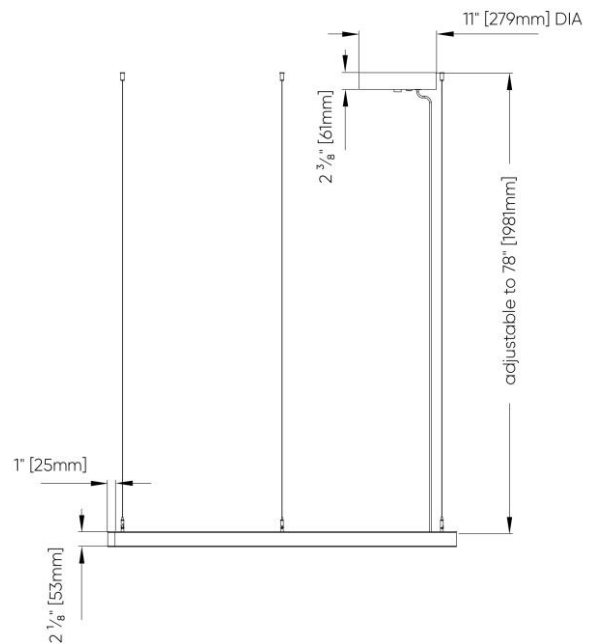


To determine the number of sections to be shipped, a final customer assembly drawing is required.
Custom shapes available.


Corner, Cross & Straight Sections

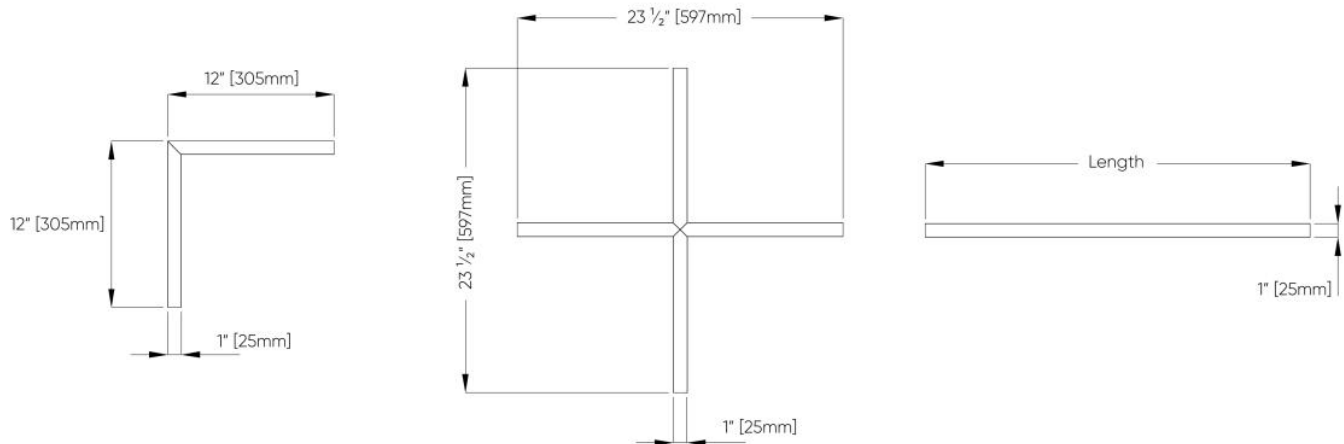

T Section

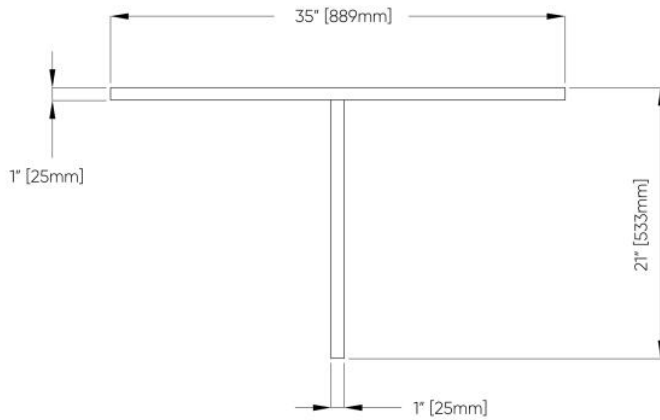

Profile View

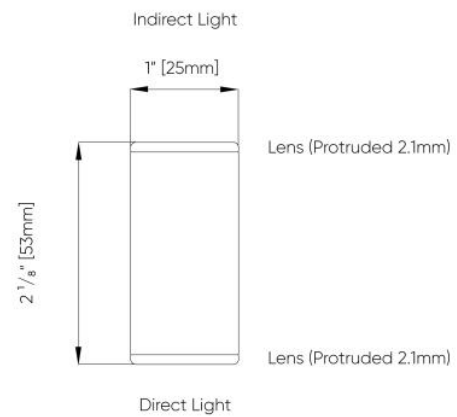

To determine the number of sections to be shipped, a final customer assembly drawing is required.
Custom shapes available.