

BLADE S™ - WALL SURFACE EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:



BLADE S™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Body and trim

Die-cast aluminum.

Finish

Powder coated, Aluminum Grey or Graphite Satin.

Lens

Tempered safety glass.

Gaskets

Heat resistant silicone.

External screws

304 stainless steel.

Minimum Starting Temperature

-30°C.

Drivers for white LED

Integral, HPF electronic for 120-277V.


Mechanical

Mounts directly over a 2" x 3" electrical junction box (by others).

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES

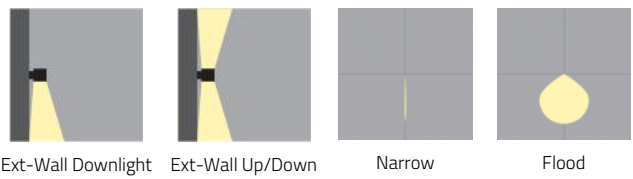

Ext-Wall Downlight

Ext-Wall Up/Down

Narrow

Flood

BLADE S™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

661030 661030	661040 661040	661050 661050	661060 661060
661070 661070			

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------

C. FINISH

AL Aluminum Gray	GS Graphite Satin
-------------------------	--------------------------

D. DIMMING

DB Dimming 13W and higher, 0-10V, 10%

TECHNICAL DATA

LUMINAIRE

Code	661030	661040	661050	661060	661070
Beam	Wide	Wide/Wide	Wide/Narrow	Narrow/Narrow	Narrow
Beam °	101°	101°/101°	101°/3x33°	3x33°/3x33°	3x33°
Wattage	13W	11W + 11W	13W + 3W	3W + 3W	3W
Delivered lms	670	630 + 630	666 + 18	24 + 24	24

APPROVALS



BLADE S™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

