






BUBBLE UP™


FULL SPECIFICATION SHEET

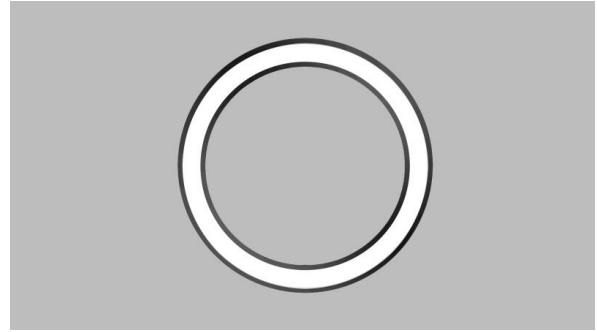

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

No shape evokes harmony, community, and perfection quite like the circle. **BUBBLE UP** is a family of recessed circles ranging from 27" to 59" in diameter, offering a variety of light combinations to complement design themes from elegant to whimsical. Constructed with a single piece of opal acrylic for the lens, aluminum rings, and white-painted screws, this refined recessed fixture transcends contemporary architecture, perfectly blending into modern interiors.


2 OPTICS & FEATURES



Recessed



Direct



Declare

3 APPROVALS



4 GENERAL SPECIFICATION

RECESSED HOUSING

Steel and aluminum suitable for new or existing non insulated construction, drywall or plasterboard ceilings. Luminaires are mounted by cable suspension within the ceiling cavity. Anchoring of cables to load bearing ceiling structure (by others).

CENTRE DISC

For non illuminating center version, drywall disc to be supplied and installed by others. Drywall disc to be painted to match ceiling.

VERSIONS

Recessed luminaires available in three diameters: 685mm/27", 1092mm/43" and 1495mm/59".

ELECTRICAL

Through branch wiring. J box and driver housing easily accessible.

DELIVERED LUMENS

Delivered lumens and LPW based on 3000K (min 80 CRI).

APPROVALS

Damp location, (Indoor use only).

DRIVERS

Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard for white LEDs. The ballast is integral to the fixture housing.

LENSES

Single piece opal acrylic, retained by metal rings and white painted screws.

RGB DRIVERS/POWER SUPPLIES

Luminaires supplied with electronic drivers/DMX interfaces, 120/277V.

SENSORS

Consult factory regarding sensor compatibility.

FINISH

White powder coated.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 HOW TO ORDER

LUMINAIRE	CCT	OPTIONS
941001 27", Ring of White LEDs, 4076 lms 941011 43", Ring of White LEDs, 6764 lms 941021 59", Ring of White LEDs, 9788 lms 941101 27", Ring of RGB LEDs 941111 43", Ring of RGB LEDs 941121 59", Ring of RGB LEDs 941201 27", Ring of White LEDs/RGB Center 941211 43", Ring of White LEDs/RGB Center 941221 59", Ring of White LEDs/RGB Center 941301 27", Ring of RGB LEDs/White LED Center 941311 43", Ring of RGB LEDs/White LED Center 941321 59", Ring of RGB LEDs/White LED Center	30 3000K 35 3500K 40 4000K	3 347V

6 TECHNICAL DATA

LUMINAIRE

Code	941001	941011	941021	941101	941111	941121
Light Distribution	Ring of White LEDs	Ring of White LEDs	Ring of White LEDs	Ring of RGB LEDs	Ring of RGB LEDs	Ring of RGB LEDs
Diameter	27"	43"	59"	27"	43"	59"
Power (LED)	103W	168W	232W	45W	80W	110W
Delivered lms	4076	6764	9788			
Delivered lms (White LEDs only)						
LPW	40	40	42			
Code	941201	941211	941221	941301	941311	941321
Light Distribution	Ring of White LEDs/RGB Center	Ring of White LEDs/RGB Center	Ring of White LEDs/RGB Center	Ring of RGB LEDs/White LED Center	Ring of RGB LEDs/White LED Center	Ring of RGB LEDs/White LED Center
Diameter	27"	43"	59"	27"	43"	59"
Power (LED)	103W+27W RGB	168W+55W RGB	232W+80W RGB	45W RGB+60W	80W RGB+115W	110W RGB+170W
Delivered lms						
Delivered lms (White LEDs only)	4076	6764	9788	2294	4684	7344
LPW				40	40	42

7 DIMENSIONAL DIAGRAMS

