

# BUBBLE RGB™ - 600/1000/1800

|               |               |
|---------------|---------------|
| Project Name: | Fixture Type: |
| Fixture Code: | Quantities:   |



# BUBBLE RGB™ - 600/1000/1800

## GENERAL SPECIFICATION

### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubbles supplied in the following diameters: 600mm (23.6") 1000mm (39.4") and 1800mm (70.9").

### Drivers/power supplies

Luminaires supplied with electronic drivers/DMX interfaces, 120/277V.

### RGB control

Luminaires require a DMX controller by others.

### Finish

White RAL 9003.

### Lenses

Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams. Bubble 600, 3 lenses; Bubble 1000, 3 lenses and Bubble 1800, 8 lenses.

### Power cables

Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. *Custom cable lengths can be supplied to special order.*


### Mechanical

Luminaires mount directly over a junction box.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Suspended 2 sides

# BUBBLE RGB™ - 600/1000/1800

## HOW TO ORDER

### A. LUMINAIRE

|                |                |                |
|----------------|----------------|----------------|
| <b>AM1</b> AM1 | <b>AM2</b> AM2 | <b>AM3</b> AM3 |
|----------------|----------------|----------------|

### B. INTEGRAL POWER SUPPLY

|                                                                    |                                                                      |                                                                       |                                                                       |
|--------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>BD0</b> Canopy with power supply and DMX interface not required | <b>BD1</b> Canopy with power supply and DMX interface for Bubble 600 | <b>BD2</b> Canopy with power supply and DMX interface for Bubble 1000 | <b>BD3</b> Canopy with power supply and DMX interface for Bubble 1800 |
|--------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|

### C. REMOTE POWER SUPPLY

|                                                                |                                                                  |                                                                   |                                                                   |
|----------------------------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| <b>BE0</b> Remote power supply with DMX interface not required | <b>BE1</b> Remote power supply with DMX interface for Bubble 600 | <b>BE2</b> Remote power supply with DMX interface for Bubble 1000 | <b>BE3</b> Remote power supply with DMX interface for Bubble 1800 |
|----------------------------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|

### D. CANOPY - REMOTE POWER SUPPLY

|                                                         |                                                                             |                                                                        |                                                                                          |
|---------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>Y0</b> Canopy for load bearing ceilings not required | <b>Y1</b> Canopy for load bearing ceilings (max 70lbs for Bubble 600 & 1000 | <b>Y2</b> Canopy for load bearing ceilings (max 220lbs for Bubble 1800 | <b>Y3</b> Canopy for false ceilings or similar (cables anchored to load bearing ceiling) |
|---------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------------------------|

For luminaires with remote power supply only.

### E. SURFACE MOUNTING KITS

|                                              |                                                |                                                 |                                                 |
|----------------------------------------------|------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| <b>BC0</b> Surface mounting kit not required | <b>BC1</b> Surface mounting kit for Bubble 600 | <b>BC2</b> Surface mounting kit for Bubble 1000 | <b>BC3</b> Surface mounting kit for Bubble 1800 |
|----------------------------------------------|------------------------------------------------|-------------------------------------------------|-------------------------------------------------|

For use with luminaires with **remote** power supply only. **Must be ordered with Y3 canopy.**

# BUBBLE RGB™ - 600/1000/1800

## TECHNICAL DATA

### LUMINAIRE


| Code         | AM1     | AM2     | AM3      |
|--------------|---------|---------|----------|
| Wattage      | 45W RGB | 80W RGB | 156W RGB |
| Diameter (A) | 23.6"   | 39.4"   | 70.9"    |
| Diameter (B) | 17.3"   | 31.5"   | 63.0"    |
| Depth (D)    | 7.5"    | 7.5"    | 7.5"     |
| Weight       | 17.9lbs | 35.5lbs | 72.8lbs  |

## APPROVALS




BUBBLE RGB™ - 600/1000/1800


DIMENSIONAL DIAGRAMS

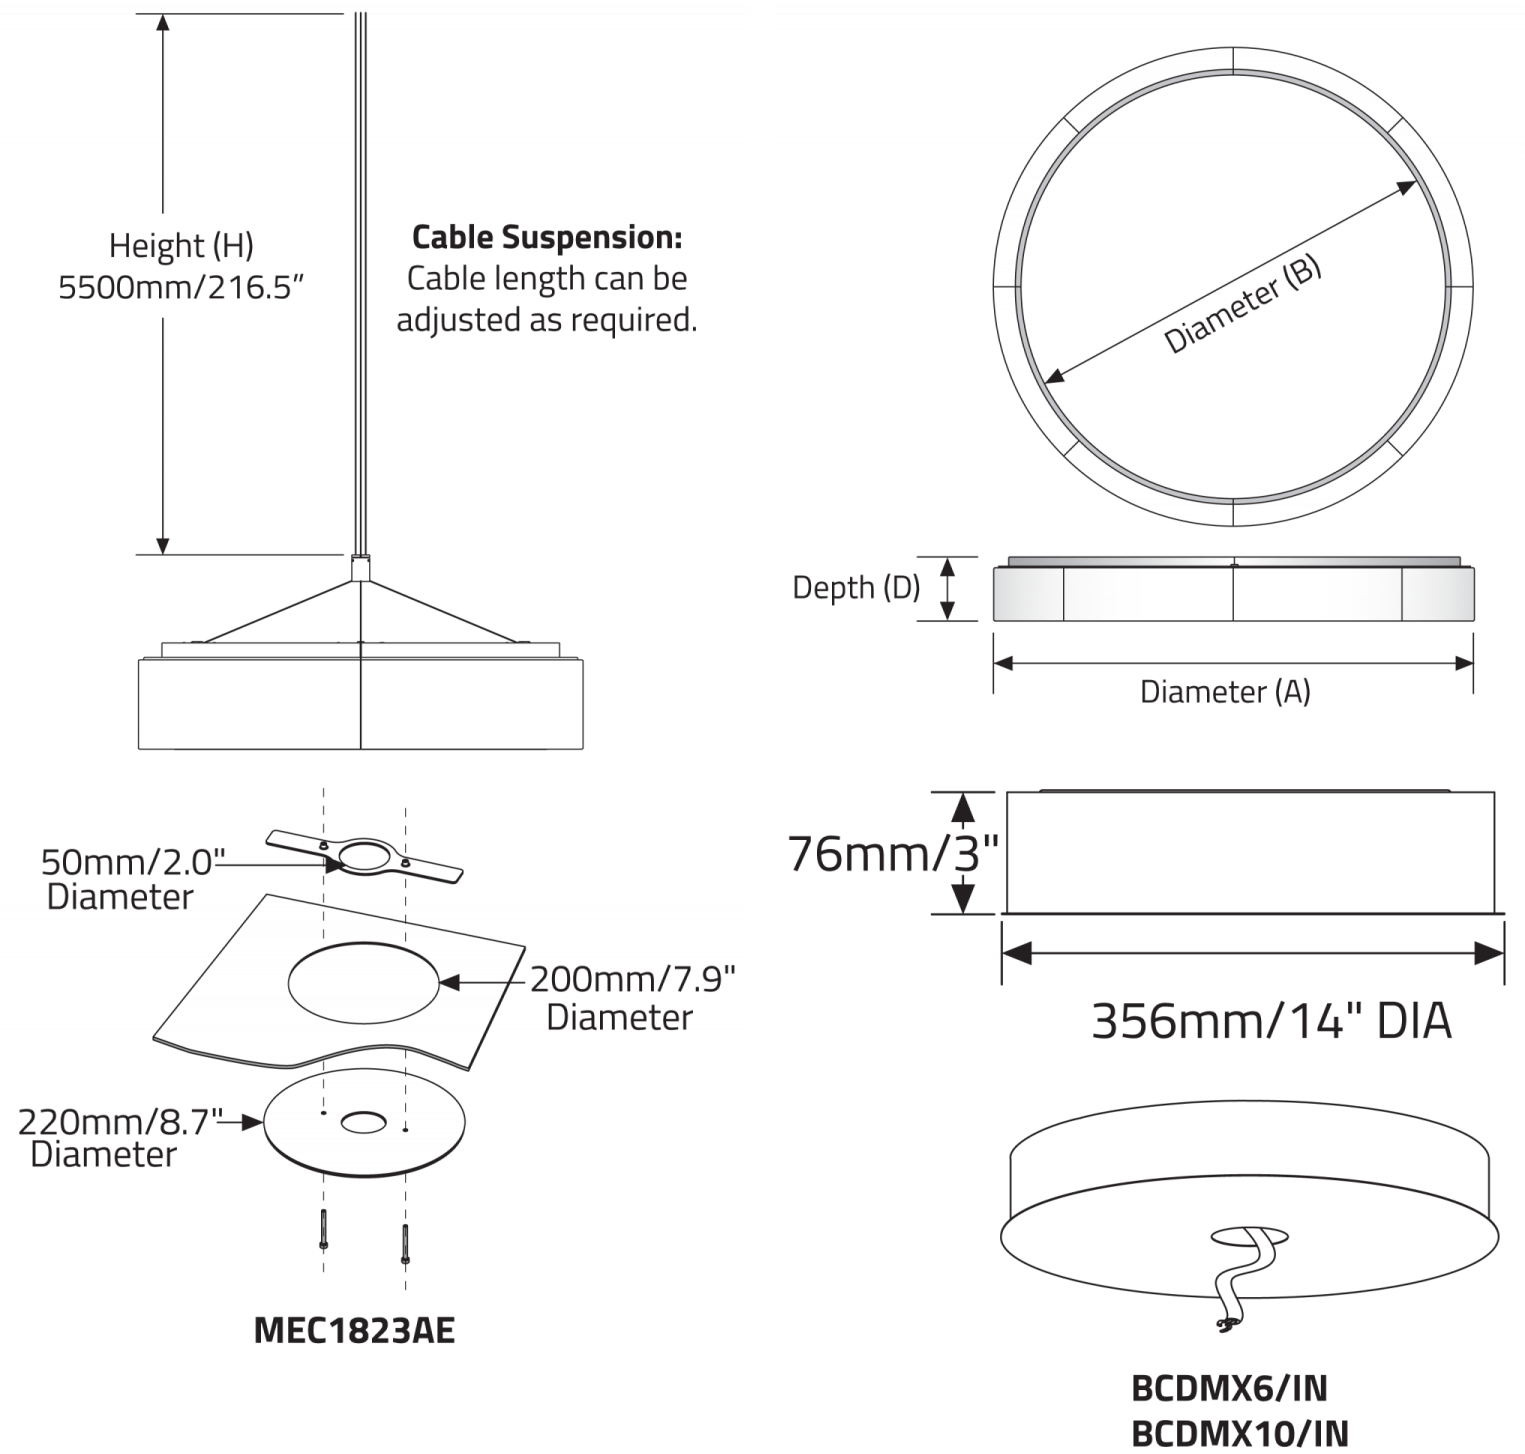


BUBBLE RGB™ - 600/1000/1800

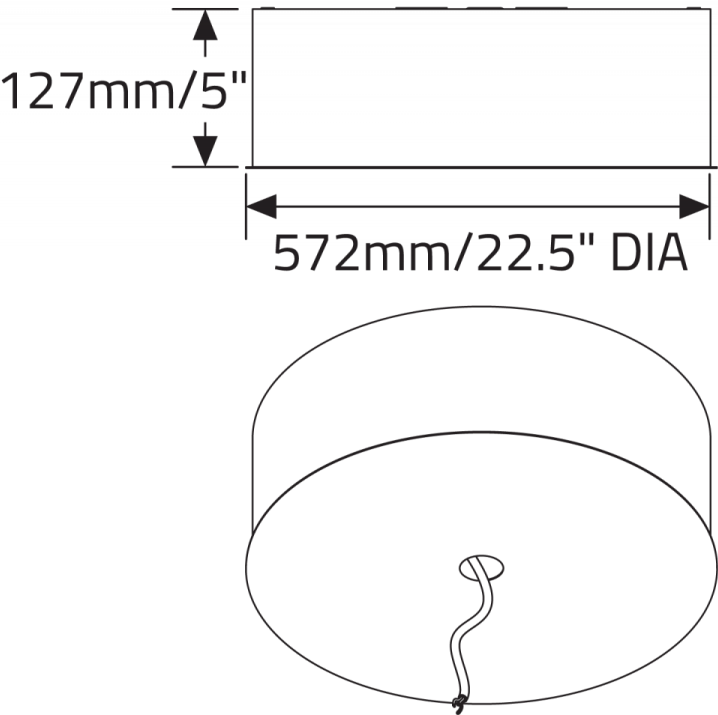


**BCDMX18/IN**

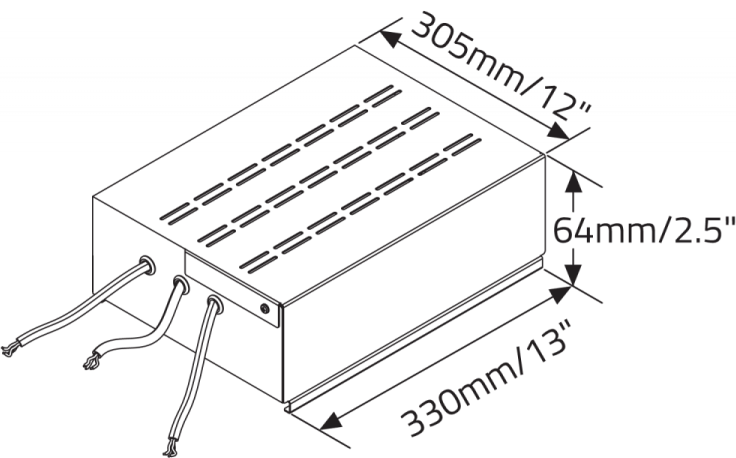


**BCDMX18/R**

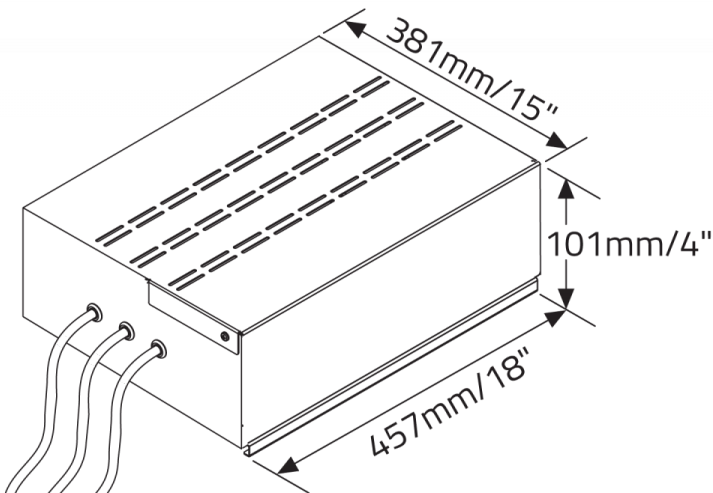

**BCDMX6/R**  
**BCDMX10/R**

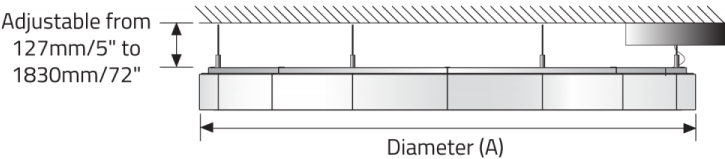

**Surface mount - Integral Power supply**

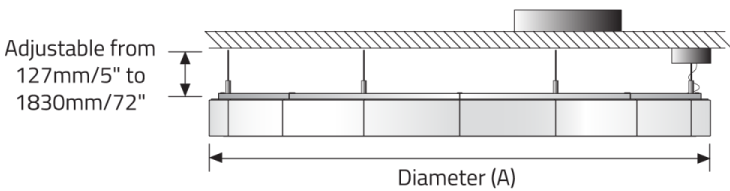

**Surface mount - Remote Power supply**