






# FELIX™


## FULL SPECIFICATION SHEET

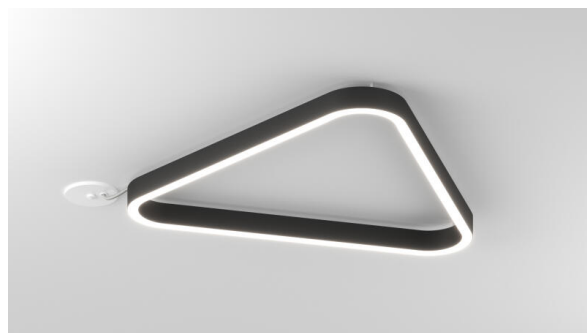

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


### 1 DESCRIPTION

**FELIX** is a decorative pendant characterized by a smooth rounded corner triangle that softens the edgy triangle shape. The shape is a compelling way to communicate dynamism and energy, and the hollow form with a 1" profile lends itself to large, spectacular configurations without overpowering. These configurations delight whether in suspended form or patterned on a surface. Along with the 10 finishes, add an extra layer of texture with 13 acoustic panel color options that control sound reflection and make the room experience comfortable with a touch of panache. **FELIX** fits in smaller spaces where the design calls for broader reach with a lightweight feel. Power over Suspension carries the sleek aesthetic and the injection-moulded corners allow for a tight radius.

### 2 OPTICS & FEATURES



Ceiling Direct



Declare



PoE

### 3 APPROVALS



DAMP  
LOCATION



IP20

### 4 GENERAL SPECIFICATION

#### BODY

Aluminum, Equilateral Triangle

#### FINISH

Powder coated

## DRIVERS

Remote HPF electronic drivers for 120-277V (EU-240V).

## REMOTE MOUNTING OF DRIVERS

Wire size 18 AWG - max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation. For longer remote distances, consult factory.

## MECHANICAL

Luminaires mount directly over J box (by others - North America only).

## ACOUSTIC PANELS NRC RATING

0.80

## ACOUSTIC PANELS MATERIAL

100% recycled polyester fiber (PET).

## DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 90 CRI).

## APPROVALS

Damp Rated.

## SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

## LENS

Frosted acrylic.

## POE

Can integrate into your data network via Power over Ethernet (PoE) connectivity.

## SENSORS

Consult factory regarding sensor compatibility.

## ACOUSTIC PANELS FIRE RATING

ASTM E84-2018 Class A.

## ACOUSTIC PANELS THICKNESS

12mm (0.5")

## REPORTED L70 @25°C(77°F)

> 102,000 hrs.

## ACOUSTIC PANEL MAINTENANCE


Durable and easy to maintain. Dust regularly and clean marks with mild detergent, rinse, and blot.

## 5 DESIGN OPTIONS

### FIXTURE FINISH



White -  
Textured



Black  
Metallic -  
Textured



Silver  
Metallic -  
Textured




Gold Metallic  
- Textured



Midnight  
Blue Metallic  
- Textured



Copper  
Metallic



Charcoal  
Metallic -  
Textured



Bronze  
Metallic -  
Textured



Champagne  
Metallic



Red Metallic  
- Textured


### ACOUSTIC PANEL FINISH



Not required



Citrus



White



Red Coffee




Light Gray



Apple Green




Blue



Sesame  
Gray




Black



Navy Peony




Pure Red



Cloudburst



Douglas Fir



Oak

Acoustic panels exceeding 48" will have one seam. All other dimensions will be seamless. For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages. Contact factory for larger sizes and additional colors.

## 6 HOW TO ORDER

| LUMINAIRE                                                                                                                                                                                                         | LUMENS/FT - DIRECT                                                                                                                                                                                                                                              | CRI                 | CCT                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------------------|
| <b>FELC1C03</b> 3ft, 2400 lms<br><b>FELC1C04</b> 4ft, 3500 lms<br><b>FELC1C05</b> 5ft, 4700 lms<br><b>FELC1C06</b> 6ft, 5900 lms<br><b>FELC1C07</b> 7ft, 7100 lms<br><small>All data shown at max values.</small> | <b>LPF017</b> 175 lm/ft <sup>1</sup><br><b>LPF026</b> 265 lm/ft <sup>2</sup><br><b>LPF035</b> 350 lm/ft <sup>3</sup><br><small><sup>1</sup> Based on 50% of total output. <sup>2</sup> Based on 75% of total output. <sup>3</sup> 100% of total output.</small> | <b>CR90</b> CRI 90+ | <b>CTA27</b> 2700K<br><b>CTA30</b> 3000K<br><b>CTA35</b> 3500K<br><b>CTA40</b> 4000K |

| VOLTAGE                                                                                                                                                                                                                                                              | DIMMING (REMOTE)                                                                                                                                                                                                                                                                                                                                                                     | FIXTURE FINISH                                                                                                                                                                                                                                                                                                                                                                                         | ACOUSTIC PANEL COLOR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>V1</b> 120/277V<br><b>V2</b> 240V <sup>1</sup><br><b>V3</b> 347V <sup>2</sup><br><b>V4</b> Low Voltage <sup>3</sup><br><sup>1</sup> Not available in North America. <sup>2</sup> Only available with DA01 dimming. <sup>3</sup> Only available with DA45 dimming. | <b>DA01</b> 0-10V Dimming 1.0%<br><b>DA02</b> 0-10V Dimming 0.1% <sup>1</sup><br><b>DA20</b> DALI Dimming 0.1% <sup>1</sup><br><b>DA21</b> DALI Dimming 1.0% <sup>1</sup><br><b>DA30</b> DSI/switchDim <sup>2</sup><br><b>DA45</b> PoE <sup>3</sup><br><sup>1</sup> Only available with V1 and V2. <sup>2</sup> Not available in North America. <sup>3</sup> Only available with V4. | <b>FA01</b> White - Textured<br><b>FA02</b> Black Metallic - Textured<br><b>FA20</b> Silver Metallic - Textured<br><b>FA25</b> Gold Metallic - Textured<br><b>FA44</b> Midnight Blue Metallic - Textured<br><b>FA45</b> Copper Metallic<br><b>FA46</b> Charcoal Metallic - Textured<br><b>FA47</b> Bronze Metallic - Textured<br><b>FA52</b> Champagne Metallic<br><b>FA53</b> Red Metallic - Textured | <b>AP00</b> Not required<br><b>AP02</b> Citrus<br><b>AP04</b> White<br><b>AP08</b> Red Coffee<br><b>AP11</b> Light Gray<br><b>AP13</b> Apple Green<br><b>AP22</b> Blue<br><b>AP26</b> Sesame Gray<br><b>AP27</b> Black<br><b>AP47</b> Navy Peony<br><b>AP60</b> Pure Red<br><b>AP73</b> Cloudburst<br><b>AP89</b> Douglas Fir<br><b>APW01</b> Oak<br><br><small>Acoustic panels exceeding 48" will have one seam. All other dimensions will be seamless. For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages. Contact factory for larger sizes and additional colors.</small> |
| <b>EMERGENCY</b><br><b>E0</b> Not required<br><b>E2</b> Emergency system - Remote                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

7

TECHNICAL DATA

### LUMINAIRE

All data shown at max values.

| Code          | FELC1C03 | FELC1C04 | FELC1C05 | FELC1C06 | FELC1C07 |
|---------------|----------|----------|----------|----------|----------|
| Length        | 3ft      | 4ft      | 5ft      | 6ft      | 7ft      |
| Wattage       | 20       | 31       | 41       | 51       | 61       |
| Delivered lms | 2400     | 3500     | 4700     | 5900     | 7100     |
| LPW           | 116      | 116      | 116      | 116      | 116      |

8

DIMENSIONAL DIAGRAMS

