






MACRO CROSS™


FULL SPECIFICATION SHEET

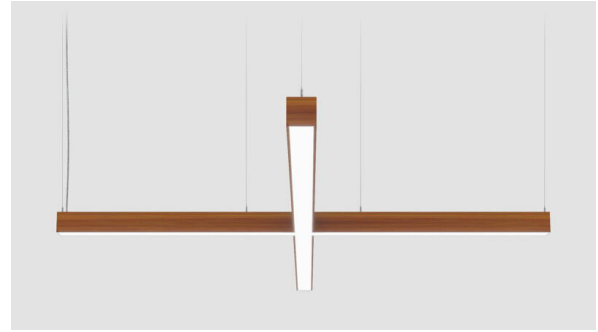

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

The robust 4" linear profile takes the form of a cross, with dimensions ranging from 30" to 85" in length and width. Excellent light performance makes **MACRO CROSS** ideal for general illumination at standard ceiling heights. An indirect light option is available with either a clear or opal diffuser. Available in 3 neutral finishes, White, Black, and Silver Metallic; as well as 2 wood grain finishes Light Cherry and Dark Walnut. Three color temperatures are available plus monochromatic red, green, and blue. **MACRO CROSS** can integrate with your data network via Power over Ethernet.


2 OPTICS & FEATURES




Suspended
Direct




Suspended
Direct/Indirect



Direct



Direct-indirect



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Steel and aluminum.

POWER CABLE

Silver braided.

FINISH

Polyester powder coated. Canopy finishes as specified except for wood grain finishes where the canopy will be supplied white.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

POE

Macro Cross can integrate into your data network via Power over Ethernet (PoE) connectivity.

MECHANICAL

Luminaires mount directly over J box (by others – North America only).

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

DRIVERS

Integral, HPF electronic drivers for 120–277V (EU–240V). The driver is integral to the fixture housing.

SUSPENSION

Stainless steel cables. Recommended minimum distance from ceiling: 305mm/12" for white LEDs and 610mm/24" for colored LEDs (only for direct/indirect).

LENS

Opal polycarbonate, supplied in sections.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for white LEDs only.

REPORTED L70 @25°C(77°F)


> 60,000 hrs.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

5 DESIGN OPTIONS

FINISH

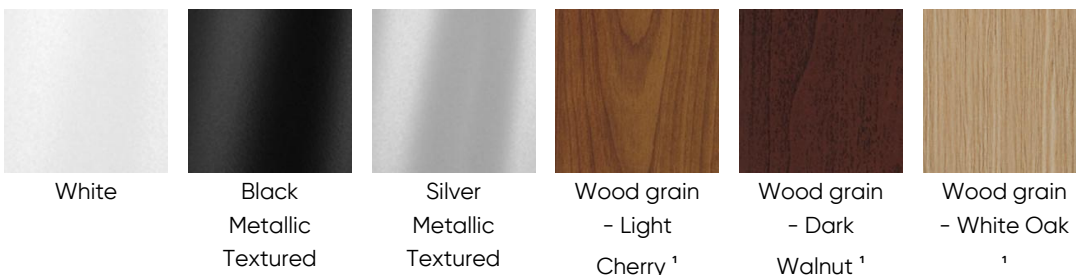

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 **HOW TO ORDER**

LUMINAIRE AB0 30", Direct, 5910 lms AB1 43", Direct, 8778 lms AB2 57", Direct, 11693 lms AB3 71", Direct, 14777 lms AB4 85", Direct, 17732 lms AB5 30", Direct/Indirect, 7860 lms AB6 43", Direct/Indirect, 11678 lms AB7 57", Direct/Indirect, 14716 lms AB8 71", Direct/Indirect, 20882 lms AB9 85", Direct/Indirect, 23578 lms	CRI CR80 CRI 80+ CR90 CRI 90+	CCT/COLOR (DIRECT) J1 2700K J2 3000K J3 3500K J4 4000K J7 Red J8 Green J9 Blue	CCT/COLOR (INDIRECT) K0 Indirect CCT not required K1 2700K K2 3000K K3 3500K K4 4000K K7 Red K8 Green K9 Blue
INDIRECT LENS U0 Not required U1 Clear U2 Opal Uplight diffuser required for direct/indirect fixtures only.	DIMMING D1 0-10V Dimming (1.0%) D2 0-10V Dimming (0.1%) D3 347V, 0-10V Dimming (1.0%) D4 DALI Dimming (0.1%) D5 DALI Dimming (1.0%) D6 DSI (EU only) D7 switchDim (EU only) DA45 PoE D6 & D7 options not available in North America. DA45 must be used with EV only.	FINISH F1 White F2 Black Metallic Textured F20 Silver Metallic Textured F27 Wood grain - Light Cherry ¹ F28 Wood grain - Dark Walnut ¹ F30 Wood grain - White Oak ¹ ¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.	
LUMEN OUTPUT L0 100% of standard output L1 Lumen & Wattage Reduction to approximately 75% of standard output L2 Lumen & Wattage Reduction to approximately 50% of standard output L3 Lumen & Wattage Reduction to approximately 25% of standard output Custom reduction percentages available upon request.		EMERGENCY E0 Emergency system not required E1 Emergency System - Integral (direct illumination only, not available with 347V)	
CONTROLS C0 Controls not required C1 Encelium/Zigbee control	SWITCHING W0 Single circuit W1 Separate switching	OPTIONAL LOW VOLTAGE EV Low Voltage To be used with DA45 only.	

7 TECHNICAL DATA


LUMINAIRE

Code	AB0	AB1	AB2	AB3	AB4	AB5
Size	30"	43"	57"	71"	85"	30"
Wattage	57W	84W	112W	142W	170W	75W
Light Direction	Direct	Direct	Direct	Direct	Direct	Direct/Indirect
Delivered lms	5910	8778	11693	14777	17732	7860
LPW	104	105	105	105	105	105
Suspension Points	4	4	5	5	5	4


Code	AB6	AB7	AB8	AB9
Size	43"	57"	71"	85"
Wattage	111W	140W	199W	224W
Light Direction	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
Delivered lms	11678	14716	20882	23578
LPW	105	105	105	105
Suspension Points	4	5	5	5

8 TM-30 DATA


CCT 2700K

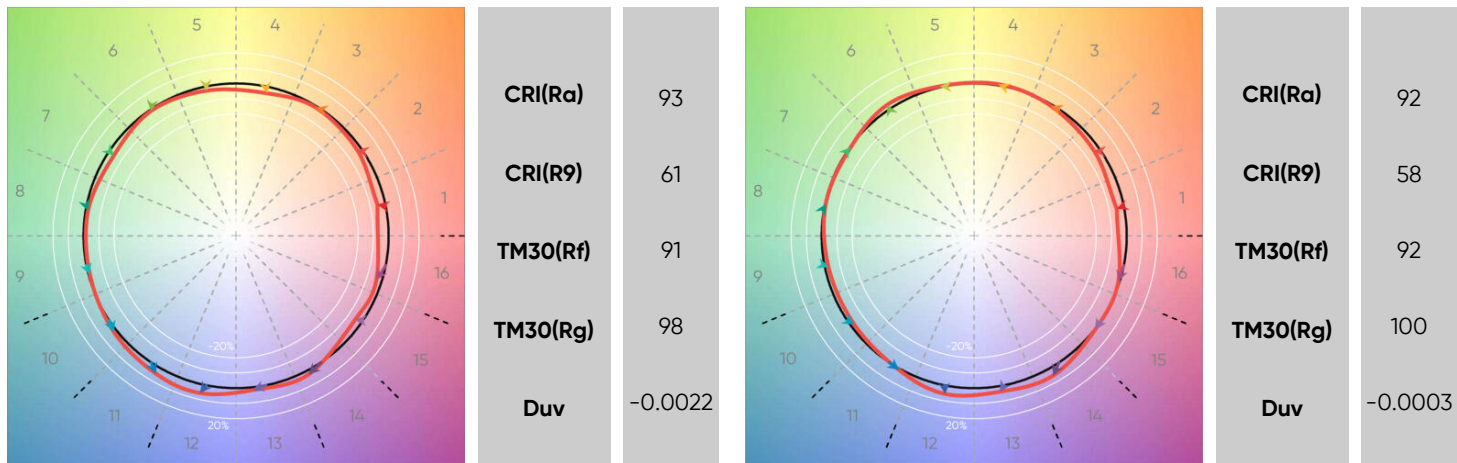

CCT 3000K

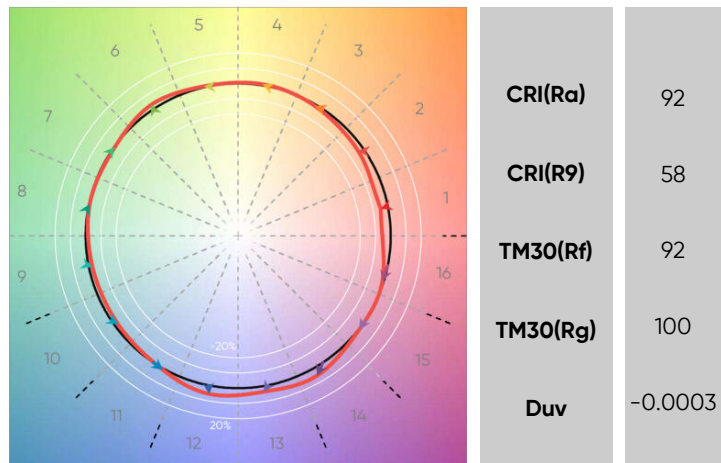


CCT 3500K

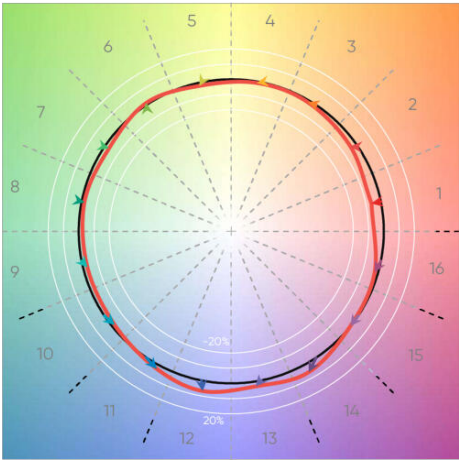

CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007




CCT 4000K

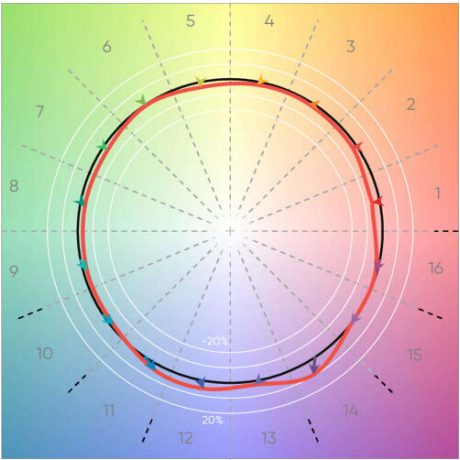

CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

9

DIMENSIONAL DIAGRAMS

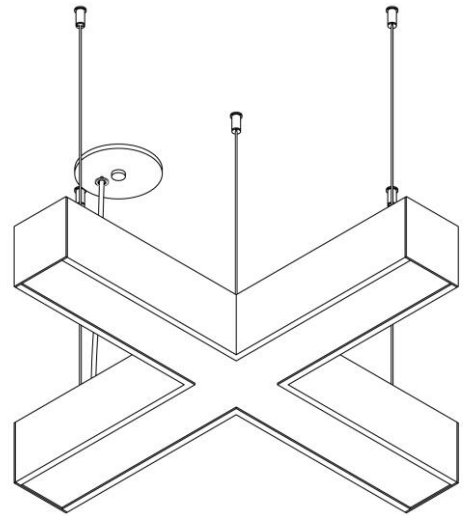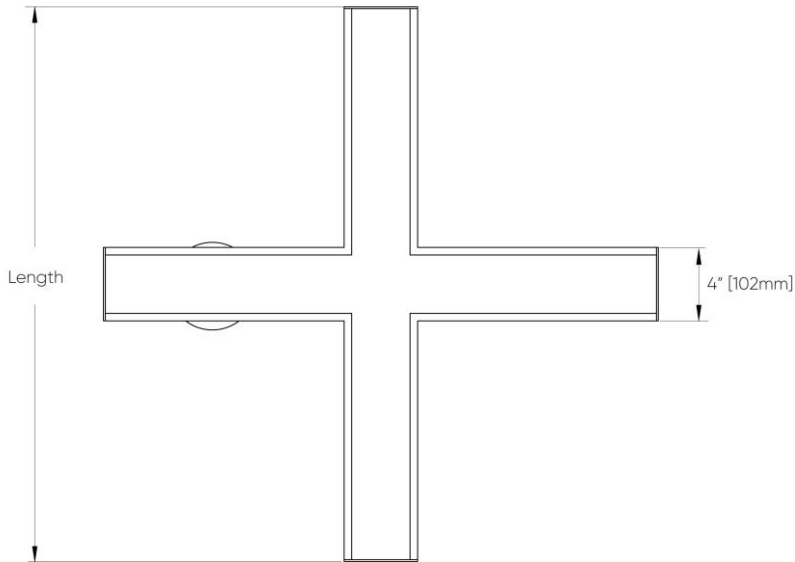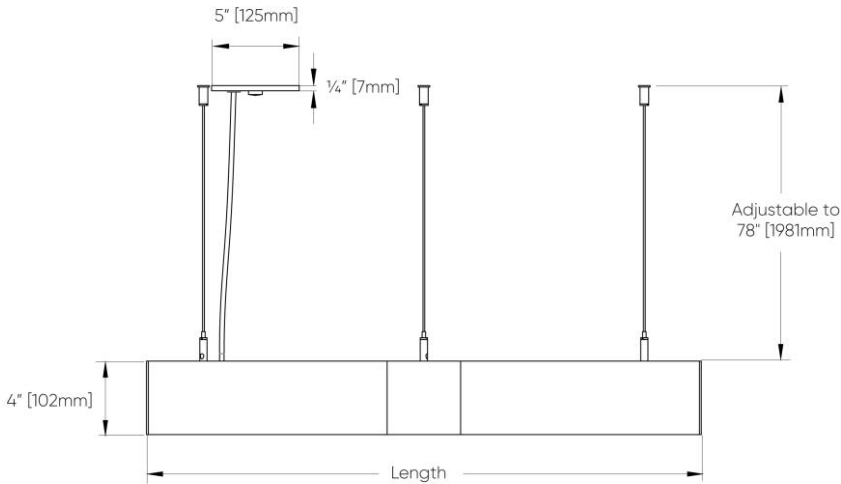

ISO VIEW

Length	Suspension Points
30" [762mm]	4
43" [1092mm]	4
57" [1448mm]	5
71" [1803mm]	5
85" [2159mm]	5