





MATREX RD DUAL TWIST™


FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 DESCRIPTION

MATREX TWIST is a hybrid surface and pendant mount with a horizontal rotation of 180 degrees. The **MATREX** family of spotlights is packed with power for projecting light at great distances. With best-in-class thermal management and hidden heat sinks, **MATREX's** form factor is significantly smaller than traditional spotlights. Multiple mounting systems are available, providing a variety of functions that work in a range of applications, especially those with multiple ceiling heights. The revolutionary design delivers industry-leading performance from a significantly reduced form factor. The snoots are effective in controlling light spill and reducing glare.

2 OPTICS & FEATURES

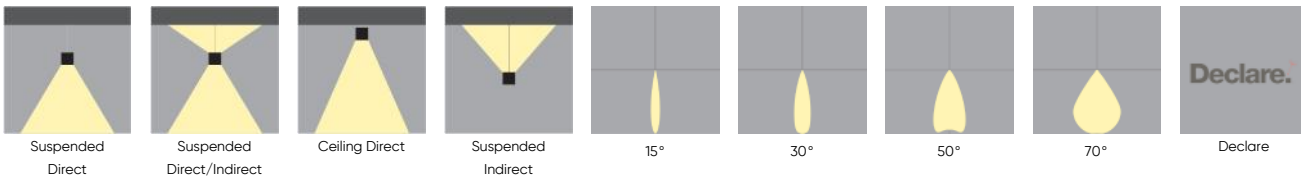

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Steel and aluminum.

FINISH

Powder coated as specified. Custom paint finishes available to special order.

SUSPENSION

Steel cables.

MECHANICAL

Luminaires mount to a junction box or switch box (by others – North America only), depending on canopy selection.

DELIVERED LUMENS

Delivered lumens & lpw based on 4000K, CRI 80+.

REPORTED L70 @25°C (77°F)

> 60,000 hrs.

APPROVALS

Damp Rated.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement.
Contact the factory for maintenance documentation.

POWER CABLE

Silver braided.

DRIVERS

HPF, electronic, 120–277V, 347V (EU–240V). The driver is integral to the fixture housing.

SENSORS

Consult factory regarding sensor compatibility.

ESTIMATED L70 @25°C (77°F)

> 171,000 hrs.

DESIGNED BY


Serge Cornelissen.

5 DESIGN OPTIONS

FINISH - FIXTURE




White




Black
Metallic –
Textured



Silver
Metallic –
Textured



Midnight
Blue Metallic
– Textured



Charcoal
Metallic –
Textured



Bronze
Metallic –
Textured



Red Metallic
– Textured

6 HOW TO ORDER

LUMINAIRE

MRDTIP01 Double Down, LEDs / Multi-Array Optics, 20100 lms

MRDT2P01 Direct/Indirect, LEDs / Multi-Array Optics, 20100 lms

MRDTIP02 Double Down, COB / Reflector, 10050 lms

MRDT2P02 Direct/Indirect, COB / Reflector, 10050 lms

All data shown at max output and nominal values. For MRDT2P01 and MRDT2P02 (Direct/Indirect) the upper module will be direct and the lower module will be indirect.

LUMENS (UPPER MODULE)

LMA0250 2500

LMA0500 5025

LMA0750 7500 ¹

LMA1000 10050 ¹

For MRDT2P01 and MRDT2P02 (Direct/Indirect) the upper module will be direct and the lower module will be indirect.

¹ Not available with COB / Reflector.

* Max lumen values shown, refer to IES files for the different snoot and beam options.

LUMENS (LOWER MODULE)

LMB0250 2500

LMB0500 5025

LMB0750 7500 ¹

LMB1000 10050 ¹

For MRDT2P01 and MRDT2P02 (Direct/Indirect) the upper module will be direct and the lower module will be indirect.

¹ Not available with COB / Reflector.

* Max lumen values shown, refer to IES files for the different snoot and beam options.

CRI CR80 CRI 80+ CR90 CRI 90+ ¹ ¹ Not available with COB / Reflector.	CCT CTA27 2700K ¹ CTA30 3000K CTA35 3500K CTA40 4000K ¹ 2700K is only available with CRI 80+	BEAM ANGLE (UPPER MODULE) BA15 15° ¹ BA30 30° ¹ BA50 50° BA70 70° ¹ ¹ 15°, 30°, and 70° are not available with COB / Reflector.
BEAM ANGLE (LOWER MODULE) BB15 15° ¹ BB30 30° ¹ BB50 50° BB70 70° ¹ ¹ 15°, 30°, and 70° are not available with COB / Reflector.	VOLTAGE V1 120/277V V2 240V ¹ V3 347V ² ¹ Not available in North America. ² Only available with DA01 dimming.	DIMMING DA01 0-10V Dimming 1.0% DA02 0-10V Dimming 0.1% ¹ DA20 DALI Dimming 0.1% ¹ DA21 DALI Dimming 1.0% ¹ DA30 DSI/switchDim ^{1 2} ¹ Not available with V3. ² Not available in North America.
FIXTURE FINISH FA01 White FA02 Black Metallic – Textured FA20 Silver Metallic – Textured FA44 Midnight Blue Metallic – Textured FA46 Charcoal Metallic – Textured FA47 Bronze Metallic – Textured FA53 Red Metallic – Textured		
SNOOTS AND LOUVER (UPPER MODULE) NT1 Standard Snoot – Black ¹ NT2 Standard Snoot – White ¹ NT3 Long Snoot – Black ^{1 2} NT4 Long Snoot – White ^{1 2} NT9 Hex Louver – Black ^{2 3} For precise beam angle and lumen output, please refer to the IES files. Note that using snoots may decrease overall efficacy. For COB/Reflector, the bezel finish matches the snoot finish. ¹ Snoot must be picked at time of order, if not ordering a louver. ² Not available with COB / Reflector. ³ Not available with BA70 beam angle. Available with Double Down version only.		
SNOOTS AND LOUVER (LOWER MODULE) NU1 Standard Snoot – Black ¹ NU2 Standard Snoot – White ¹ NU3 Long Snoot – Black ^{1 2} NU4 Long Snoot – White ^{1 2} NU9 Hex Louver – Black ^{2 3} For precise beam angle and lumen output, please refer to the IES files. Note that using snoots and louvers may decrease overall efficacy. For COB/Reflector, the bezel finish matches the snoot finish. ¹ Snoot must be picked at time of order, if not ordering a louver. ² Not available with BB70 beam angle. Available with Double Down version only.		

7 TECHNICAL DATA


LUMINAIRE

All data shown at max output and nominal values. For MRDT2P01 and MRDT2P02 (Direct/Indirect) the upper module will be direct and the lower module will be indirect.

Code	MRDT1P01	MRDT2P01	MRDT1P02	MRDT2P02
Light Direction	Double Down	Direct/Indirect	Double Down	Direct/Indirect
Max Wattage	186W	186W	88W	88W
Max Delivered lms	20100	20100	10050	10050
Max LPW	124	124	111	111

8 PERFORMANCE DATA

DIRECT 15° BEAM ANGLE



WATTS

38
82
130
186


LUMENS

5000
9800
14800
20000

LPW

132
121
114
106

DIRECT 30° BEAM ANGLE



WATTS

38
82
130
186


LUMENS

5000
10050
15000
20100

LPW

135
124
116
108

DIRECT 50° BEAM ANGLE



WATTS

38
82
130
186


LUMENS

4800
9600
14200
19000

LPW

128
117
110
102

DIRECT 70° BEAM ANGLE



WATTS

38
82
130
186

LUMENS




4800
9600
14400
19200

LPW


129
118
111
103

9 DIMENSIONAL DIAGRAMS

Direct/Indirect

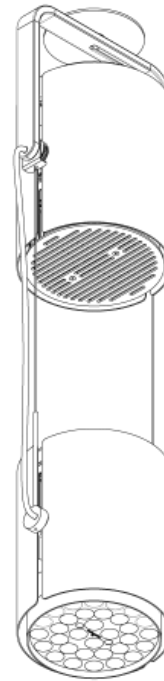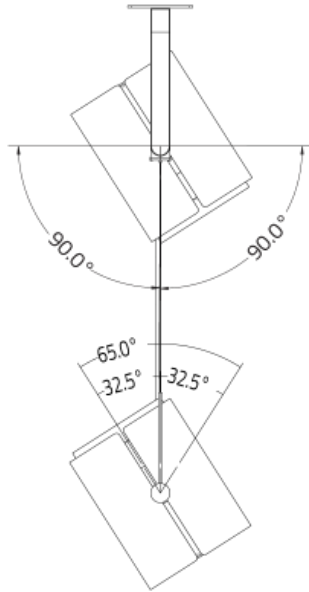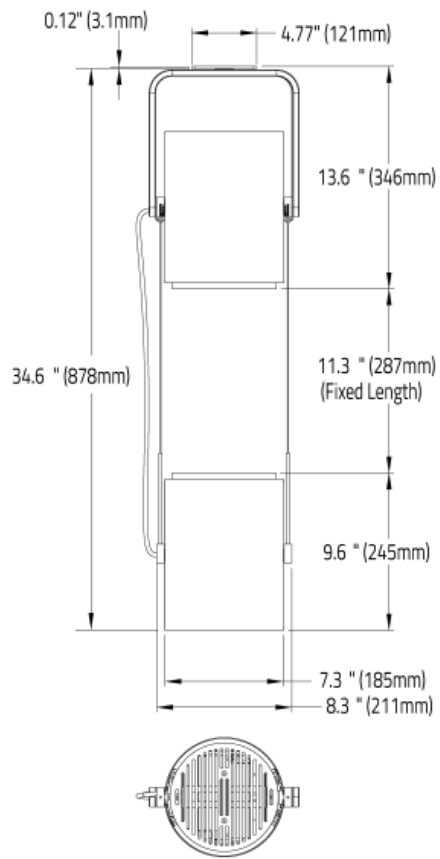




ISOMETRIC BOTTOM VIEW
STRAIGHT

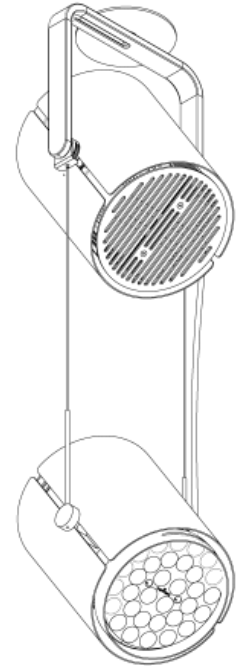


ISOMETRIC VIEW
ANGLED

MATREX RD DUAL TWIST™ – SURFACE FULL SPECIFICATION SHEET

Double Down

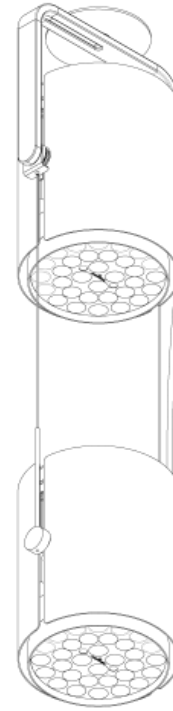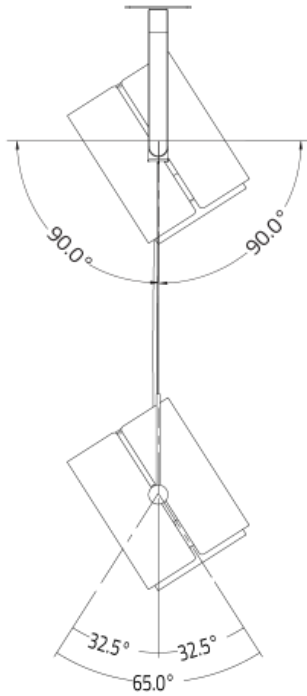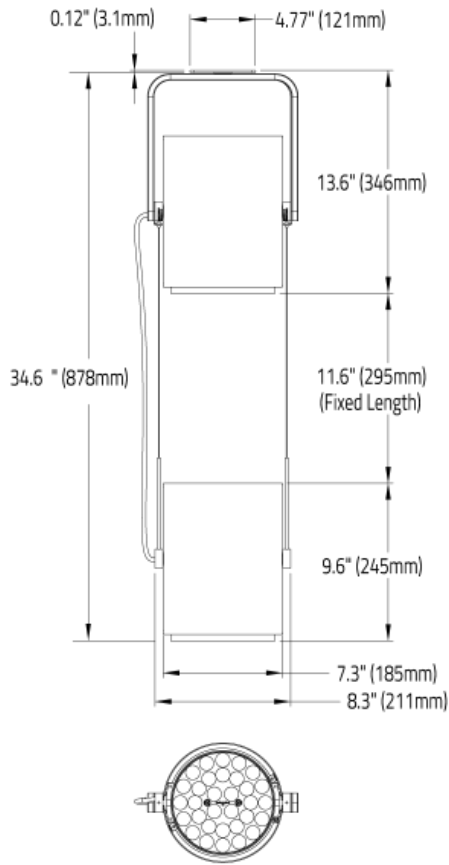



ISOMETRIC BOTTOM VIEW
STRAIGHT

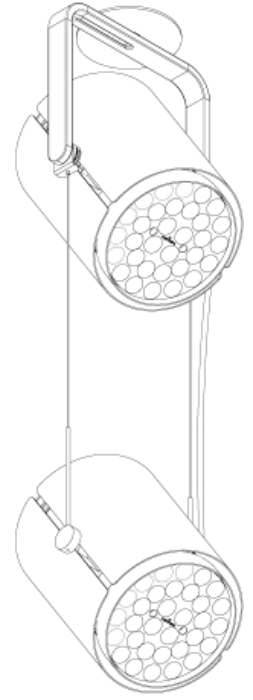

ISOMETRIC VIEW
ANGLED



Snoots

STANDARD SNOOT

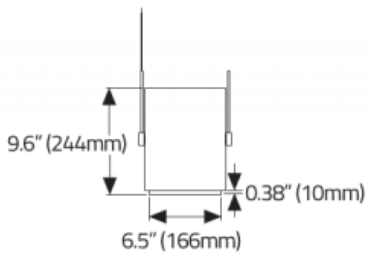

ISOMETRIC VIEW




LONG SNOOT

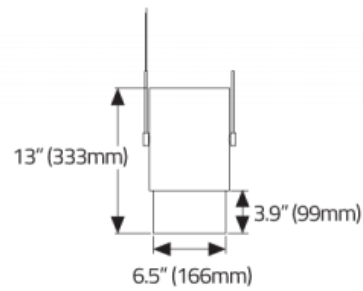

ISOMETRIC VIEW



LOUVRE

HEX CELL LOUVRE

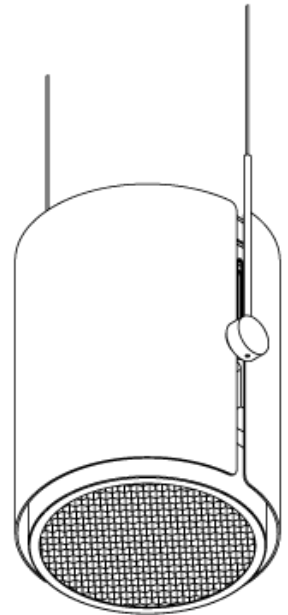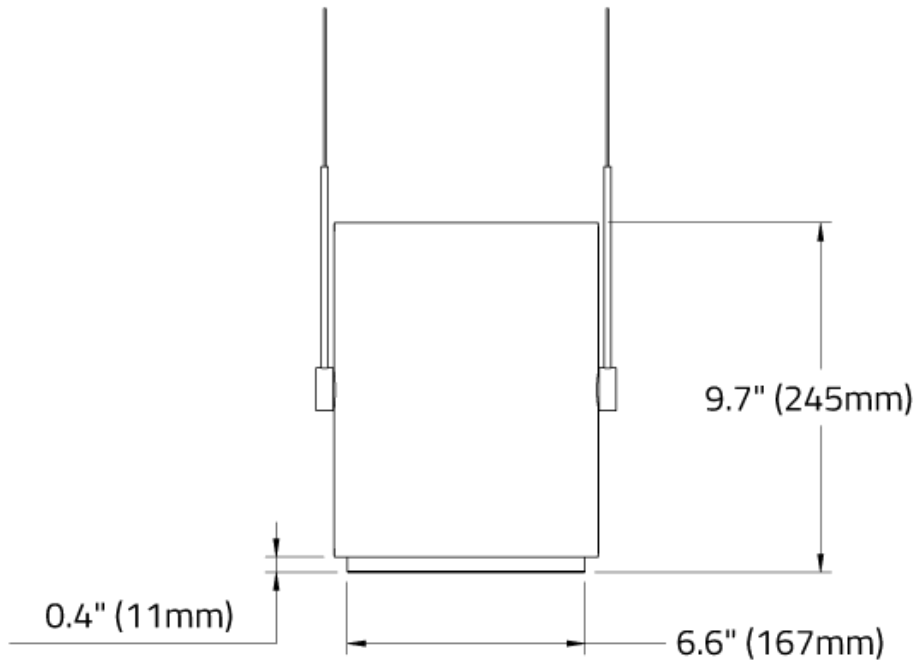

Matrex Round PD – COB

Matrex RD PD - COB

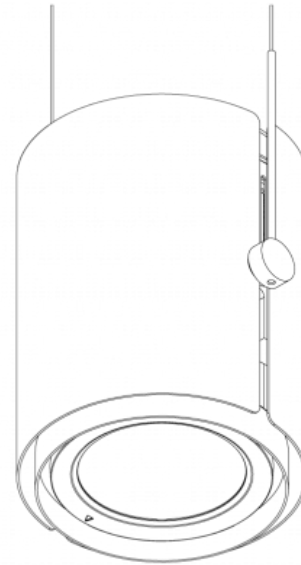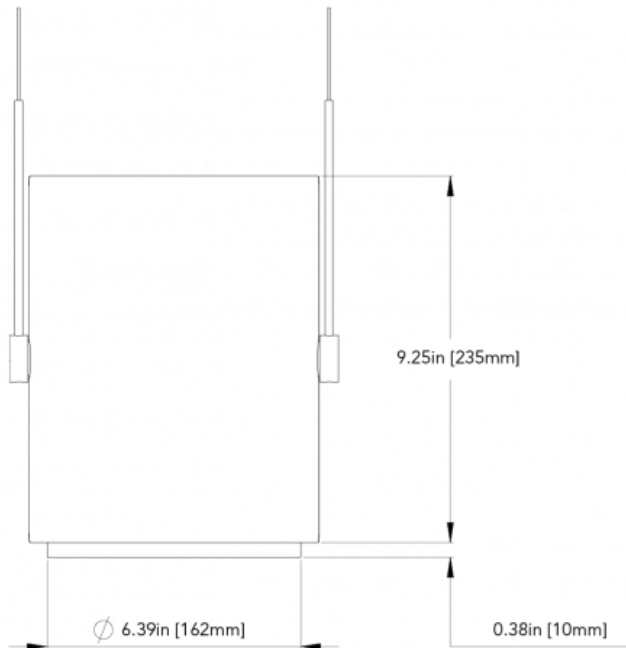

Isometric View

