

MICRO ELLIPSE II™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



MICRO ELLIPSE II™ - SUSPENDED



MICRO ELLIPSE II™ - SUSPENDED

No shape is more graceful than the ellipse. Featuring an ultra-sleek design profile of 1" and length ranging from 3' to 7', **MICRO ELLIPSE II** is ideal for creating a lasting impression. This dynamic shape offers direct or indirect light, providing versatility for unique illuminating effects. Boasting a high-efficiency, flexible lens that snugly fits the frame, MICRO ELLIPSE II eliminates any light leakage while ensuring a uniform and seamless diffusion of light. Whether used as a solitary statement piece or in a composition, MICRO ELLIPSE II's impact is undeniable, particularly notable for the ambient halo effect it casts with its indirect lighting. Moreover, MICRO ELLIPSE II addresses acoustic needs with an optional acoustic panel for sizes up to 4 feet in length. These panels are designed to reduce echo and reverberation commonly found in modern open-plan spaces, areas with exposed concrete, open ceilings, and large windows. For a touch of whimsy and creative flair, MICRO ELLIPSE II can be combined with other shapes like MICRO RING, MICRO TRIANGLE or MICRO QUAD, adding a dynamic and playful dimension to any space.

GENERAL SPECIFICATION

Body

Aluminum.

Suspension

POS or Power cord suspension.

Drivers

HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture canopy or remote mount depending on which options are selected.

Mechanical

Luminaires mount directly over J box (by others - North America only).

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Sensors

Consult factory regarding sensor compatibility.

Acoustic Panels NRC Rating

0.80

Acoustic Panels Material

100% recycled polyester fiber (PET).

Reported L70 @25°C (77°F)

> 60,000 hrs.

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

Finish

Powder coated.

Power cable

Silver braided.

Lens

Protruding Lens 0.08"(2.1mm).

PoE

Micro Ellipse II can integrate into your data network via Power over Ethernet (PoE) connectivity.

Remote Mounting Of Drivers

Wire size 18 AWG - max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation. For longer remote distances, consult factory.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Acoustic Panels Fire Rating

ASTM E84-2018 Class A.

Acoustic Panels Thickness

12mm (0.5")

Approvals

Damp Rated.

Acoustic Panel Maintenance

Durable and easy to maintain. Dust regularly and clean marks with mild detergent, rinse, and blot.

MICRO ELLIPSE II™ - SUSPENDED


OPTICS & FEATURES



Suspended Direct



Suspended Direct/Indirect



Direct



Direct-Indirect



Declare



PoE

MICRO ELLIPSE II™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

METP1P03 915mm Direct, 2300lms	METP1P04 1219mm Direct, 3200lms	METP1P05 1524mm Direct, 4100lms	METP1P06 1829mm Direct, 4800lms
METP1P07 2134mm Direct, 5600lms	METP2P03 915mm Direct/Indirect, 4900 lms	METP2P04 1219mm Direct/Indirect, 6700lms	METP2P05 1524mm Direct/Indirect, 8000lms
METP2P06 1829mm Direct/Indirect, 9500lms	METP2P07 2134mm Direct/Indirect, 11300lms		

B. LUMENS/M DIRECT

LPF017 575 lm/m ¹	LPF026 850 lm/m ²	LPF035 1150 lm/m ³
-------------------------------------	-------------------------------------	--------------------------------------

¹ 50% of total output.

² 75% of total output.

³ 100% total output.

C. LUMENS/M INDIRECT

LPG000 Not required	LPG017 575 lm/m ¹	LPG026 850 lm/m ²	LPG035 1150 lm/m ³
----------------------------	-------------------------------------	-------------------------------------	--------------------------------------

¹ 50% of total output.

² 75% of total output.

³ 100% total output.

D. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

E. CCT DIRECT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

F. CCT INDIRECT

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K			

G. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.

² Available with DA01 dimming only.

H. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0% ¹	DA20 DALI Dimming 0.1% ^{1 2}	DA21 DALI Dimming 1.0% ^{1 2}	DA45 PoE ³
---	--	--	------------------------------

¹ Not available with V4.

² Not available with V3.

³ Available with V4 only.

MICRO ELLIPSE II™ - SUSPENDED

I. SUSPENSION

SS1 Vertical, Remote driver	SS2 Hub, Remote driver ¹	SS3 Vertical, Driver Integral to Canopy ²	SS4 Hub, Driver Integral to Canopy ¹
SS6 POS, Vertical, Remote driver ³	SS7 POS, Hub, Remote driver ⁴	SS9 POS, Hub, Driver Integral to Canopy ⁴	

¹ Not available for 1524mm diameter or larger.
² Direct/Indirect not available for 2134mm diameter.
³ Direct only light distribution. Available up to 1524mm diameter and North America only.
⁴ Available with 120V only.

J. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic			

K. CANOPY FINISH

CF01 White	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured	CF25 Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured	CF47 Bronze Metallic - Textured
CF52 Champagne Metallic			

L. ACOUSTIC PANEL FINISH

AP00 Not required	AP02 Citrus	AP04	AP08 Red Coffee
AP11 Light Gray	AP13	AP22	AP26
AP27	AP47 Navy Peony	AP60 Pure Red	AP73 Cloudburst
AP89 Douglas Fir	APW01 Oak		





For accompanying non-illuminating acoustic panels see our Acoustic Circles, Quads and Triangles spec pages.
Other finishes available. Contact factory.

M. EMERGENCY

E0 Not required	E2 Emergency system - Remote
------------------------	-------------------------------------





MICRO ELLIPSE II™ - SUSPENDED

FIXTURE FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured






Champagne Metallic





CANOPY FINISH

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured


Champagne Metallic

ACOUSTIC PANEL FINISH

							
Not required	Citrus	Red Coffee	Light Gray	Navy Peony	Pure Red	Cloudburst	Douglas Fir

					
					Oak

For accompanying non-illuminating acoustic panels see our Acoustic Circles, Quads and Triangles spec pages.
Other finishes available. Contact factory.

MICRO ELLIPSE II™ - SUSPENDED

APPROVALS




DIMENSIONAL DIAGRAMS

Power Cable Suspension


SS1

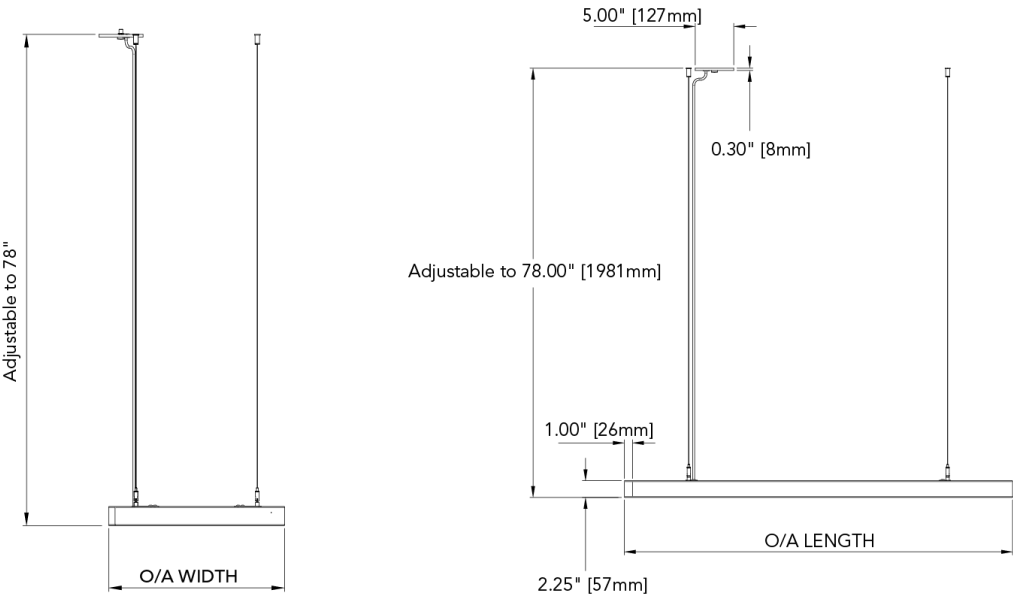Vertical - Remote Driver




SS2

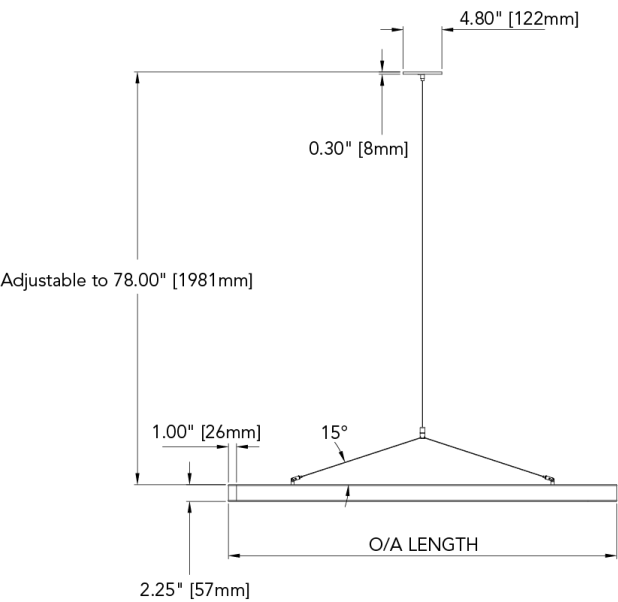Hub - Remote Driver



SS3

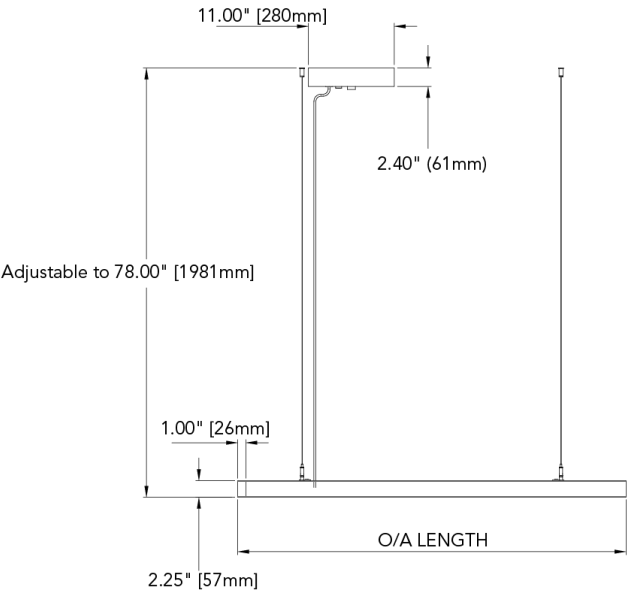
Vertical - Integral Driver



Power Cable Suspension

SS4

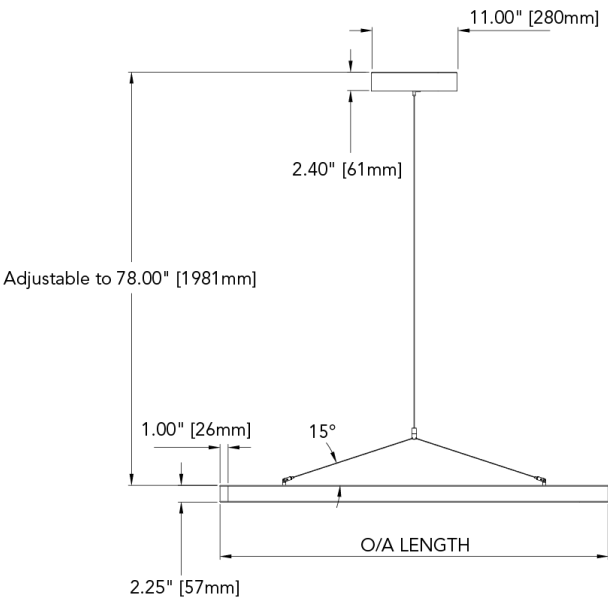
Vertical - Integral Driver



Power Over Suspension


SS6

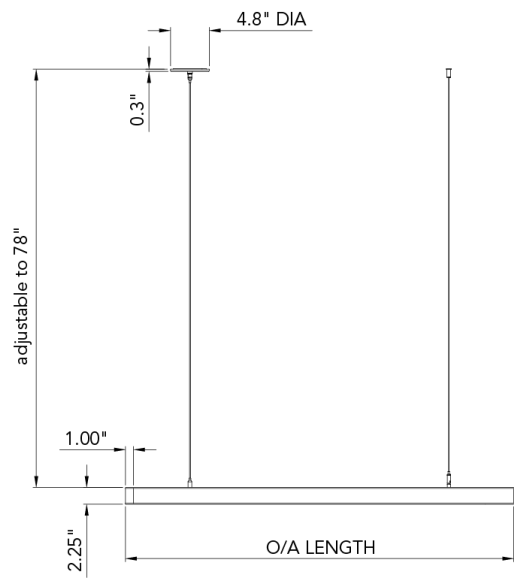Vertical - Remote Driver



SS9

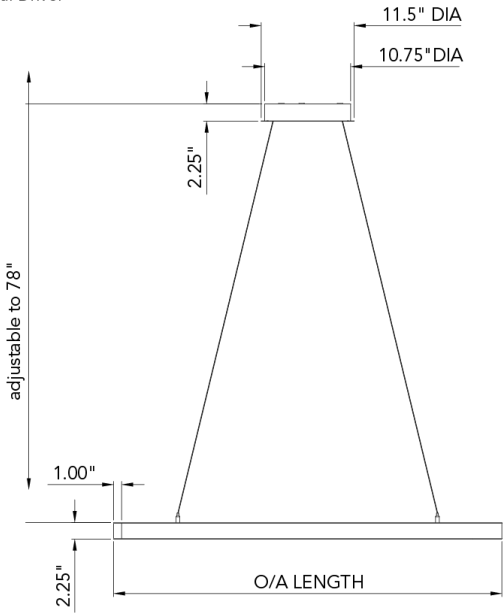Hub - Integral Driver



SS7

Hub - Remote Driver

