






MICRO QUAD II™


FULL SPECIFICATION SHEET

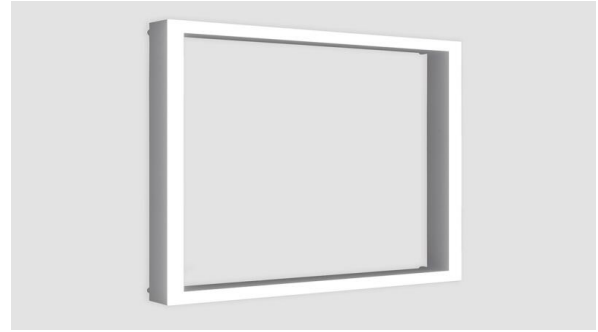

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 DESCRIPTION

The straight lines and right angles of the rectangle add a balanced and grounded feel to a space. With a super-slim 1" profile and several quadrilaterals ranging from 2' to 7' squared, **MICRO QUAD II** is ideal for creating and complementing grid effects on the ceiling, or as part of a wall design that can frame decorative features with light. The light emission is direct/indirect and can be coordinated with MICRO QUAD DE which emits light from the inner and outer sides of the frame. The indirect light creates a halo effect that adds to the illumination of the immediate area. For a whimsical style, combine **MICRO QUAD** with MICRO RING or MICRO TRIANGLE.


2 OPTICS & FEATURES




Ceiling
Direct/Indirect




Ceiling Direct



Wall
Direct/Indirect



Wall Direct



Direct



Direct-indirect



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminium.

POE

Micro Quad II can integrate into your data network via Power over Ethernet (PoE) connectivity.

DRIVERS

Remote, HPF electronic drivers for 120–277V (EU–240V). Wire size 18 AWG – max distance (from fixture to drivers)40', wire size 16 AWG – max distance 60', wire size 14 AWG – max distance 90'. Drivers must be accessible after installation. For longer remote distances, consult factory.

CRI

Fixture supplied at 80 CRI, 90 CRI available upon request.

REPORTED L70 @25°C(77°F)

> 60,000 hrs.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

FINISH

Powder coated.

LENS

Frosted acrylic. Lens protrudes 4.8mm/0.19".

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

SENSORS




Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

5 DESIGN OPTIONS

FINISH

							
White	Black Metallic Textured	Silver Metallic Textured	Gold Metallic – Textured	Midnight Blue Metallic – Textured	Copper Metallic	Charcoal Metallic – Textured	Bronze Metallic – Textured



Champagne
Metallic

6 HOW TO ORDER

LUMINARIE LENGTH 983610 24", Direct, 1650 lms 983620 36", Direct, 2474 lms 983630 48", Direct, 3300 lms 983640 60", Direct, 4124 lms 983650 71", Direct, 4948 lms 983660 83", Direct, 5774 lms 983710 24", Direct/Indirect, 2018 lms 983720 36", Direct/Indirect, 3026 lms 983730 48", Direct/Indirect, 4034 lms 983740 60", Direct/Indirect, 5044 lms 983750 71", Direct/Indirect, 6052 lms 983760 83", Direct/Indirect, 7060 lms Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width = 2474 + 4034 = 6508 total lumens.	WIDTH WD24 24", Direct, 1650 lms WD36 36", Direct, 2474 lms WD48 48", Direct, 3300 lms WD60 60", Direct, 4124 lms WD71 71", Direct, 4948 lms WD83 83", Direct, 5774 lms WDI24 24", Direct/Indirect, 3356 lms WDI36 36", Direct/Indirect, 3026 lms WDI48 48", Direct/Indirect, 4034 lms WDI60 60", Direct/Indirect, 5044 lms WDI71 71", Direct/Indirect, 6052 lms WDI83 83", Direct/Indirect, 11746 lms	CCT/COLOR (DIRECT) D27 2700K (min 80 CRI) D30 3000K (min 80 CRI) D35 3500K (min 80 CRI) D40 4000K (min 80 CRI) DRD Red DGN Green DBL Blue CR90 (CRI 90+) available upon request, consult factory.
CCT/COLOR (INDIRECT) N27 2700K (min 80 CRI) N30 3000K (min 80 CRI) N35 3500K (min 80 CRI) N40 4000K (min 80 CRI) NRD Red NGN Green NBL Blue CR90 (CRI 90+) available upon request, consult factory. ¹ Longer than normal lead times may apply, consult factory.	DIMMING D1 0-10V Dimming 1.0% D4 DALI Dimming 0.1% ¹ D5 DALI Dimming 1.0% ¹ DA45 PoE ² ¹ D4 & D5 not available with 983750 or 983760. ² DA45 must be used with EV only.	FINISH WH White BL Black Metallic Textured MS Silver Metallic Textured FA25 Gold Metallic – Textured FA44 Midnight Blue Metallic – Textured FA45 Copper Metallic FA46 Charcoal Metallic – Textured FA47 Bronze Metallic – Textured FA52 Champagne Metallic
LUMEN & WATTAGE REDUCTION (DIRECT ILLUMINATION ONLY) PR1 Lumen & Wattage Reduction to approximately 50% of standard output PR2 Lumen & Wattage Reduction to approximately 75% of standard output PR1 is not available with 983610. Lumen reduction available for direct light only. Custom reduction percentages available upon request.		
OPTIONAL LOW VOLTAGE EV Low Voltage To be used with DA45 only.		

7 TECHNICAL DATA
LUMINAIRE

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width
 =2474 + 4034 = 6508 total lumens.

Code	983610	983620	983630	983640	983650	983660
Length	24"	36"	48"	60"	71"	83"
Power (LED)	13W	20W	27W	33W	40W	47W
Light Direction	Direct	Direct	Direct	Direct	Direct	Direct
Delivered lms (Length)	1650	2474	3300	4124	4948	5774
LPW	125	124	124	124	124	124

Code	983710	983720	983730	983740	983750	983760
Length	24"	36"	48"	60"	71"	83"
Power (LED)	16W	24W	32W	40W	48W	56W
Light Direction	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
Delivered lms (Length)	2018	3026	4034	5044	6052	7060
LPW	126	126	126	126	126	126


WIDTH

Code	WD24	WD36	WD48	WD60	WD71	WD83
Width	24"	36"	48"	60"	71"	83"
Power (LED)	13W	20W	27W	33W	40W	47W
Light Direction	Direct	Direct	Direct	Direct	Direct	Direct
Delivered lms (Width)	1650	2474	3300	4124	4948	5774
LPW	125	124	124	124	124	124

Code	WDI24	WDI36	WDI48	WDI60	WDI71	WDI83
Width	24"	36"	48"	60"	71"	83"
Power (LED)	16W	24W	32W	40W	48W	56W
Light Direction	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
Delivered lms (Width)	2018	3026	4034	5044	6052	7060
LPW	126	126	126	126	126	126


8 TM-30 DATA

CCT 2700K

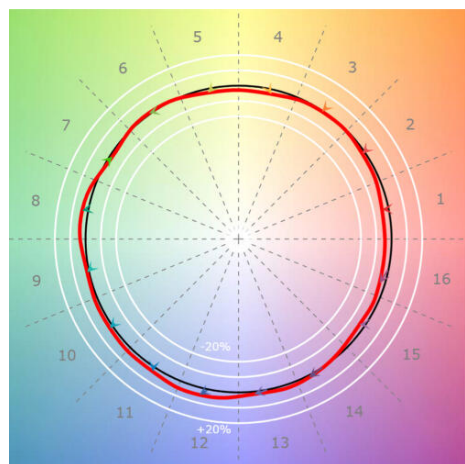


CRI(Ra)	94
CRI(R9)	58
TM30(Rf)	93
TM30(Rg)	99
Duv	0.0004

CCT 3000K

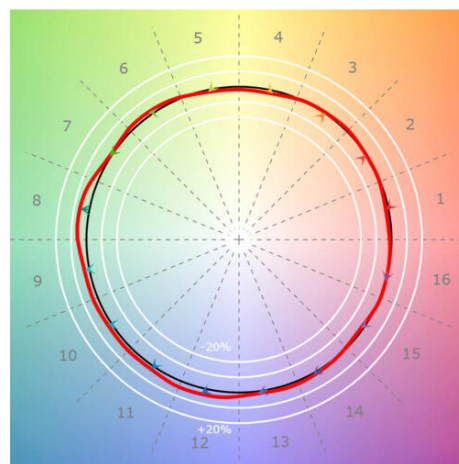


CRI(Ra)	94
CRI(R9)	75
TM30(Rf)	93
TM30(Rg)	102
Duv	-0.0001

CCT 3500K

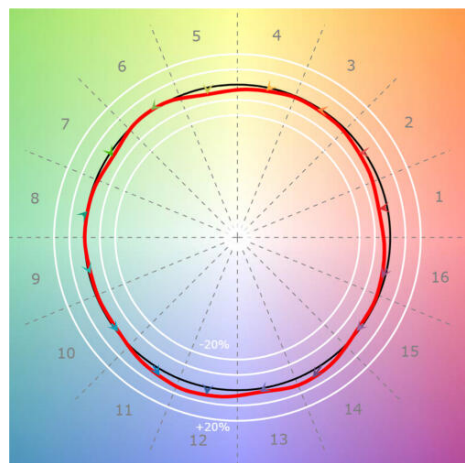


CRI(Ra)	94
CRI(R9)	53
TM30(Rf)	91
TM30(Rg)	98
Duv	0.0009

CCT 4000K

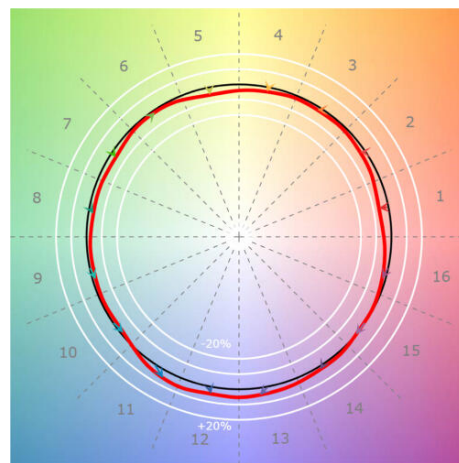

CRI(Ra)	92
CRI(R9)	50
TM30(Rf)	89
TM30(Rg)	97
Duv	0.0011

9 DIMENSIONAL DIAGRAMS

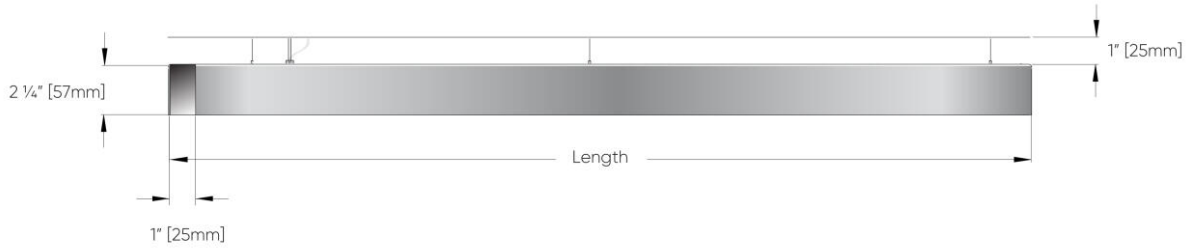

Note: The diffuser protrudes by 3/16" [5mm]



Note: The diffuser protrudes by 3/16" [5mm]