





MIDI ARC H™


FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 DESCRIPTION

MIDI ARC's Curved edge softens architectural lines and raises the impact of distinctive spaces. The smooth edges of **MIDI ARC** add a sleek and enticing appearance. Available in 4 distinct sizes, the **MIDI ARC** series offers 12 finish options for a look that truly represents your vision and enhances the curvature of the profile. The curved edge design brings a softer architectural profile to the space. The series also comes with multiple lumen packages to choose from so that you can illuminate your space in the most optimal way.


2 OPTICS & FEATURES



Wall -
Direct/Indirect



Wall - Direct



Declare

3 APPROVALS

ADA



DAMP
LOCATION



IP20

4 GENERAL SPECIFICATION

BODY

Aluminum.

LENS

Frosted acrylic.

REMOTE EMERGENCY

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only). The maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

DRIVERS

HPF electronic for 120-277V (EU-240V). The driver is integral to the fixture housing.

REPORTED L70 @25°C(77°F)

> 60,000 hrs.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

FINISH

Powder coated or polished aluminum.

SENSORS

Consult factory regarding sensor compatibility.

MECHANICAL

Luminaires mount directly over a horizontally installed 2"x3" switch box (by others – North America only).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI).

APPROVALS

Damp Rated.

5 DESIGN OPTIONS

FINISH



6 HOW TO ORDER

LUMINAIRE MAHW1P02 610mm, Direct, 1000 lms Direct MAHW1P03 889mm, Direct, 1500 lms Direct MAHW1P04 1194mm, Direct, 2000 lms Direct MAHW1P06 1778mm, Direct, 3000 lms Direct MAHW2P02 610mm, Direct/Indirect, 1000 lms Direct, 1000 lms Indirect MAHW2P03 889mm, Direct/Indirect, 1500 lms Direct, 1500 lms Indirect MAHW2P04 1194mm, Direct/Indirect, 2000 lms Direct, 2000 lms Indirect MAHW2P06 1778mm, Direct/Indirect, 3000 lms Direct, 3000 lms Indirect Delivered lumens are shown at max output. For continuous runs, consult factory.		LUMENS (DIRECT) LMA0100 1000 lm LMA0150 1500 lm LMA0200 2000 lm LMA0250 2500 lm LMA0300 3000 lm	
LUMENS (INDIRECT) LMB0000 Not required LMB0100 1000 lm LMB0150 1500 lm LMB0200 2000 lm LMB0250 2500 lm LMB0300 3000 lm If lumens selected for Indirect are different then the lumens selected for Direct, then the drivers will be remote. Otherwise, the drivers are integral. Example: If you choose LMA0150 & LMB0150, then drivers will be integral, if you choose LMA0150 & LMB0100, then the drivers will be remote.	CRI CR80 CRI 80+ CR90 CRI 90+	CCT CTA27 2700K CTA30 3000K CTA35 3500K CTA40 4000K	

VOLTAGE	DIMMING	FINISH	EMERGENCY
V1 120/277V V2 240V ¹ V3 347V ¹ Not available in North America	DA01 0–10V Dimming (1.0%)	FA01 White FA56 White – Gloss FA02 Black Metallic – Textured FA20 Silver Metallic – Textured FA25 Gold Metallic – Textured FA42 Polished Aluminum (mirror finish) FA44 Midnight Blue Metallic – Textured FA45 Copper Metallic FA46 Charcoal Metallic – Textured FA47 Bronze Metallic – Textured FA52 Champagne Metallic FA53 Red Metallic – Textured	E0 Emergency system not required E1 Emergency system – Integral ¹ E2 Emergency system – Remote ¹ Available for 47"(1194mm) & 70"(1778mm only) in conjunction with V2. Not available in North America.


7 TECHNICAL DATA

LUMINAIRE

Delivered lumens are shown at max output. For continuous runs, consult factory.

Code	MAHW1P02	MAHW1P03	MAHW1P04	MAHW1P06	MAHW2P02	MAHW2P03
Length (A)	610mm	889mm	1194mm	1778mm	610mm	889mm
Light Direction	Direct	Direct	Direct	Direct	Direct/Indirect	Direct/Indirect
Wattage	9W	13W	17W	26W	18W	26W
Del. lms (Direct)	1000	1500	2000	3000	1000	1500
Del. lms (Indirect)					1000	1500
LPW	118	118	118	118	118	118
Length (B)	457mm	457mm	584mm	584mm	457mm	457mm
Code	MAHW2P04	MAHW2P06				
Length (A)	1194mm	1778mm				
Light Direction	Direct/Indirect	Direct/Indirect				
Wattage	34W	51W				
Del. lms (Direct)	2000	3000				
Del. lms (Indirect)	2000	3000				
LPW	118	118				
Length (B)	584mm	584mm				

8
DIMENSIONAL DIAGRAMS

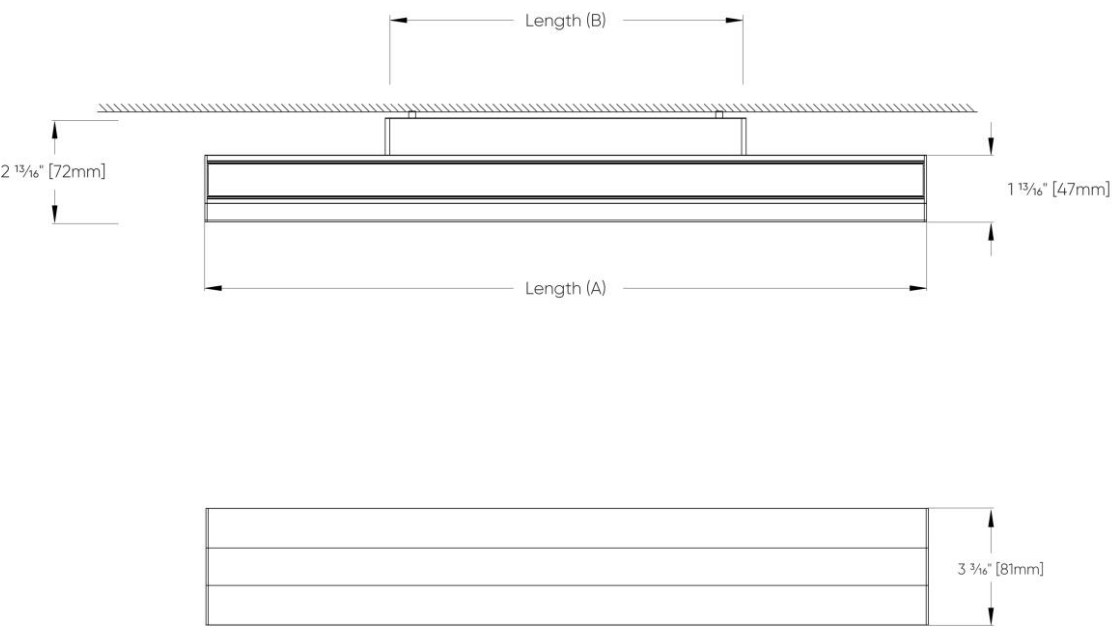

Code	Length (A)	Length (B)
MAHW1P02	610mm	457mm
MAHW1P03	889mm	457mm
MAHW1P04	1194mm	584mm
MAHW1P06	1778mm	584mm
MAHW2P02	610mm	457mm
MAHW2P03	889mm	457mm
MAHW2P04	1194mm	584mm
MAHW2P06	1778mm	584mm