





MIDI ARC RING™


FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

The gently curved edge of **MIDI ARC RING** reinterprets the classic ring shape, introducing a refined twist that enhances visual character and brings a softer profile within architectural spaces. Its smoothly contoured form delivers a distinctly modern appeal while maintaining a welcoming, elegant presence. Designed for versatility, this luminaire stands out as a focal point or blends harmoniously with its environment, offering both style and function. The versatility of being able to create a custom cluster with different size combinations enables you to create truly unique spaces.

2 OPTICS & FEATURES



Suspended
Direct



Suspended
Direct/Indirect



Declare



PoE

3 APPROVALS



DAMP
LOCATION



IP20

4 GENERAL SPECIFICATION

FINISH

Powder coated or polished.

POWER CABLE

Silver braided.

REMOTE EMERGENCY

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

DRIVERS

HPF electronic drivers for 120-277V (EU-240V). Drivers are either remote mounted or integral to the canopy depending on the size of the fixture.

MECHANICAL

Luminaires mount directly over J box (by others).

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

SUSPENSION

Steel cables.

LENS

Opal acrylic.

REMOTE MOUNTING OF DRIVERS

Wire size 18 AWG – max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG – max distance 60' (18.3m), wire size 14 AWG – max distance 90' (27.4m). Drivers must be accessible after installation. For longer remote distances, consult factory.

POE

Midi Arch Ring can integrate into your data network via Power over Ethernet (PoE) connectivity.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

L70 @25°C(77°F)

> 60,000 hrs.

DESIGN

US Pat. No. D898,979.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FIXTURE FINISH



CANOPY FINISH



6 HOW TO ORDER

LUMINAIRE MARP1P04 48" Direct, 4100 lms MARP1P05 60" Direct, 5100 lms MARP1P06 72" Direct, 6100 lms MARP1P07 84" Direct, 7200 lms MARP2P04 48" Direct/Indirect, 8200 lms MARP2P05 60" Direct/Indirect, 10200 lms MARP2P06 72" Direct/Indirect, 12200 lms MARP2P07 84" Direct/Indirect, 14400 lms Lumens shown are at max value.	LUMENS (DIRECT) LPF015 150 lms/ft ¹ LPF022 225 lms/ft ² LPF030 300 lms/ft ³ ¹ Based on 50% of total output. ² Based on 75% of total output. ³ 100% of total output	LUMENS (INDIRECT) LPG000 Not required LPG015 150 lms/ft ¹ LPG022 225 lms/ft ² LPG030 300 lms/ft ³ Values shown are nominal. ¹ Based on 50% of total output. ² Based on 75% of total output. ³ 100% of total output.	CRI CR80 CRI 80+ CR90 CRI 90+
CCT (DIRECT) CTA27 2700K CTA30 3000K CTA35 3500K CTA40 4000K	CCT (INDIRECT) CTB00 Not required CTB27 2700K CTB30 3000K CTB35 3500K CTB40 4000K	VOLTAGE V1 120/277V V2 240V ¹ ¹ Not available in North America.	SUSPENSION SS1 Vertical, Remote driver SS2 Hub, Remote driver ^{1 2} SS3 Vertical, Driver Integral to Canopy ² SS4 Hub, Driver Integral to Canopy ^{1 2} ¹ Not available with MARP1P06 and MARP1P07. ² Not available with MARP2P06 and MARP2P07.
DIMMING DA01 0-10V Dimming 1.0% DA02 0-10V Dimming 0.1% ¹ DA20 DALI Dimming 0.1% ¹ DA21 DALI Dimming 1.0% ¹ DA30 DSI/switchDim ² ¹ Not available with MARP2P05, MARP2P06 and MARP2P07. ² Not available in North America.	FIXTURE FINISH FA56 White – Gloss FA01 White FA02 Black Metallic – Textured FA20 Silver Metallic – Textured FA25 Gold Metallic – Textured FA42 Polished Aluminum – Mirror finish FA44 Midnight Blue Metallic – Textured FA45 Copper Metallic FA46 Charcoal Metallic – Textured FA47 Bronze Metallic – Textured FA52 Champagne Metallic FA53 Red Metallic – Textured	CANOPY FINISH CF56 White – Gloss CF01 White CF02 Black Metallic – Textured CF20 Silver Metallic – Textured CF25 Gold Metallic – Textured CF44 Midnight Blue Metallic – Textured CF45 Copper Metallic CF46 Charcoal Metallic – Textured CF47 Bronze Metallic – Textured CF52 Champagne Metallic CF53 Red Metallic – Textured	EMERGENCY E0 Not required E2 Emergency system – Remote
CIRCUIT CS1 Single circuit CS2 Dual circuit			

7 TECHNICAL DATA


LUMINAIRE

Lumens shown are at max value.


Code	MARP1P04	MARP1P05	MARP1P06	MARP1P07	MARP2P04	MARP2P05
Diameter (A)	48"	60"	72"	84"	48"	60"
Lm/ft Down	300	300	300	300	300	300
Lm/ft Up					300	300
Lms Down	4100	5100	6100	7200	4100	5100
Lms Up					4100	5100
Wattage	40W	54W	64W	76W	86W	108W
LPW	95	95	95	95	95	95
Suspension Points	3	3	4	4	3	3
Code	MARP2P06	MARP2P07				
Diameter (A)	72"	84"				
Lm/ft Down	300	300				
Lm/ft Up	300	300				
Lms Down	6100	7200				
Lms Up	6100	7200				
Wattage	128W	152W				
LPW	95	95				
Suspension Points	4	4				

8 DIMENSIONAL DIAGRAMS


SS1
Vertical - Remote Driver

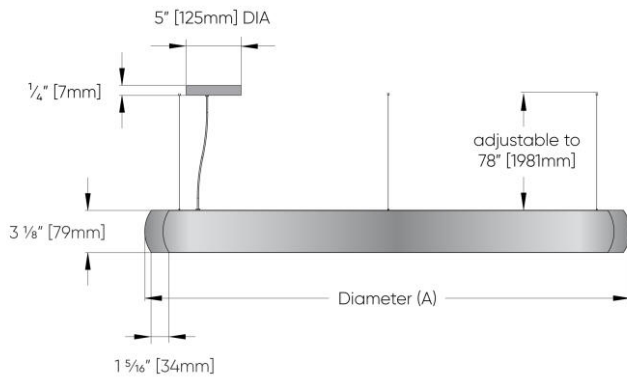


SS2
Hub - Remote Driver

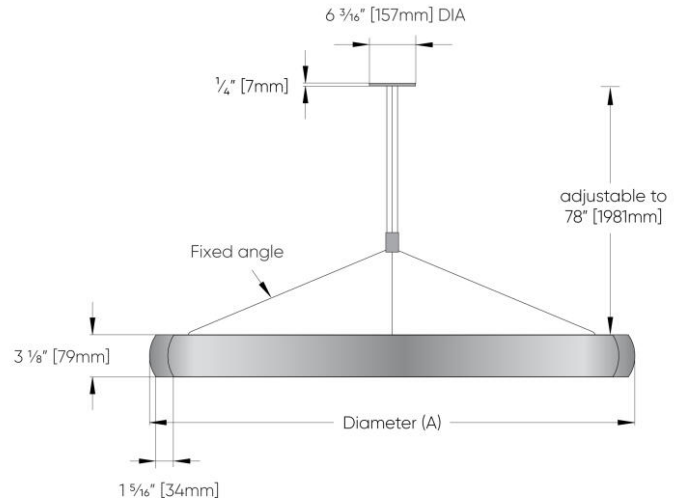


SS2
Hub - Remote Driver

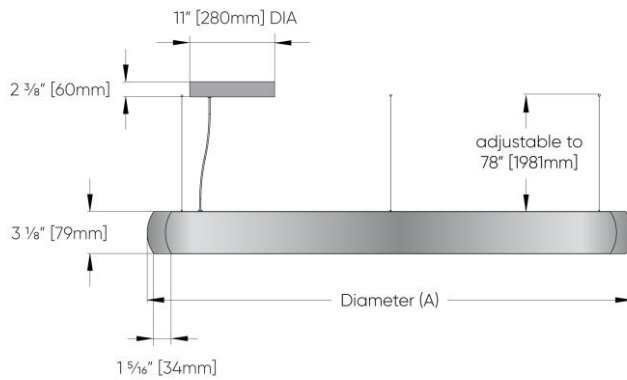


SS4
Hub - Integral Driver

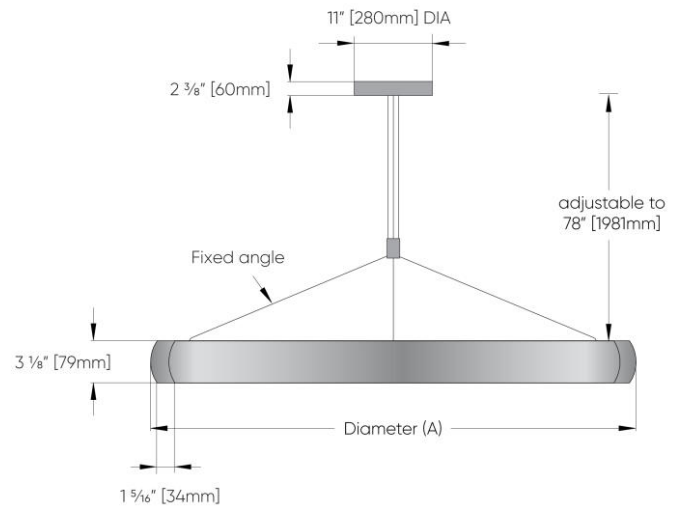

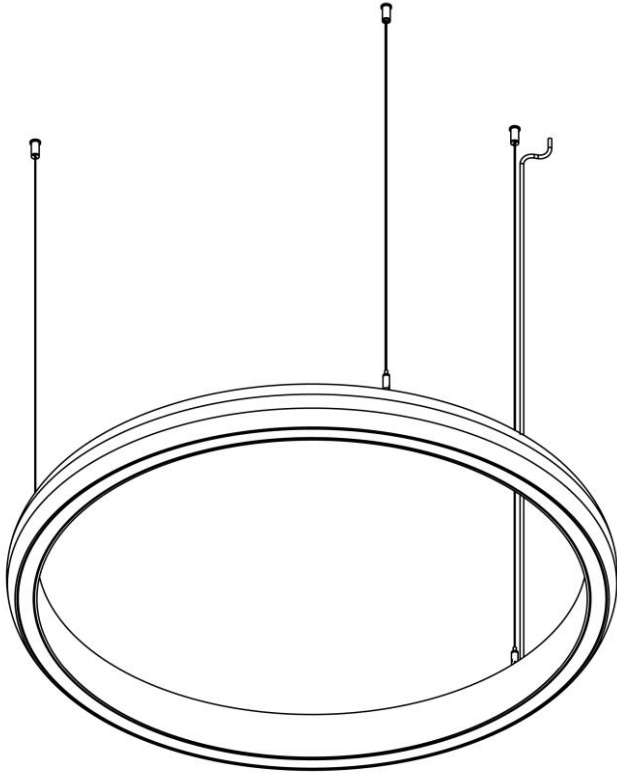

ISOMETRIC VIEW - 3 Suspension Points
48" [1219mm]
60" [1524mm]

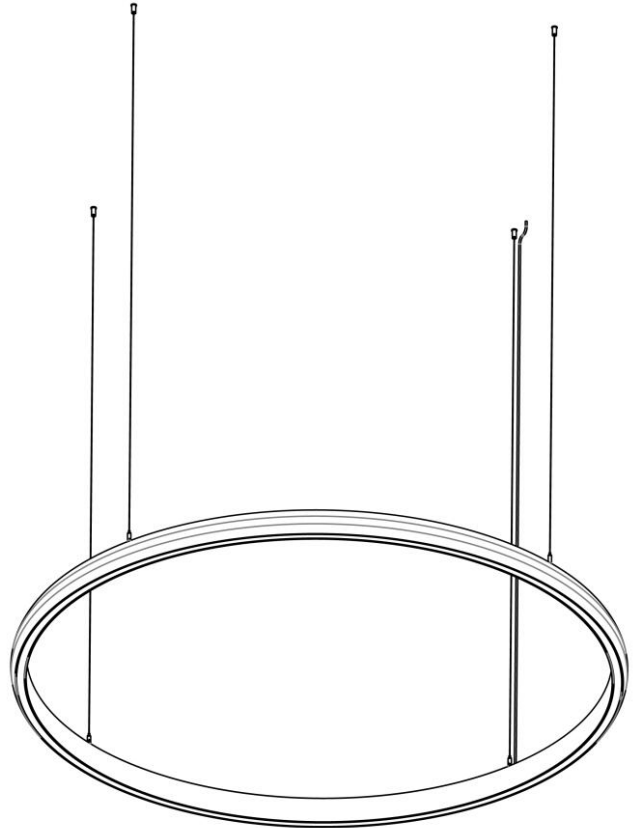

ISOMETRIC VIEW - 4 Suspension Points
72" [1829mm]
84" [2134mm]