

# ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

|               |               |
|---------------|---------------|
| Project Name: | Fixture Type: |
| Fixture Code: | Quantities:   |



# ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

## GENERAL SPECIFICATION

### Housing

Die-cast and extruded aluminum.

### Lens

Clear glass.

### Reflector

High purity aluminum, silver anodized.

### Drivers

HPF, electronic for 120-277V (EU-240V). Dimming 0-10V.

### Weight

Maximum 4Kg/8.8lb.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### External Screws

Stainless steel.

### Gaskets

One piece silicone.

### Finish

Silver powder coated light gray or black powder coated as standard.

### Minimum Starting Temperature


-30°C for LEDs.

### Mechanical

Mounts directly over an electrical junction box (by others - Noth America only).

Mounting hardware (by others).

## OPTICS & FEATURES

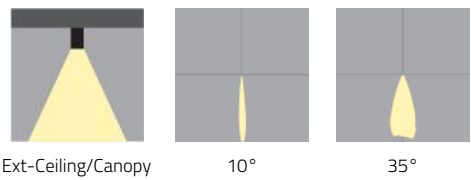

# ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

**267133** 267133                      **267143** 267143

### B. CCT

**30** 3000K (min 80 CRI)                      **40** 4000K (min 80 CRI)

### C. FINISH

**BL** Black                      **GR** Light Gray

### D. OPTIONS

**DB** Dimming (0-10V, 10%)

## TECHNICAL DATA

### LUMINAIRE


|               |               |               |
|---------------|---------------|---------------|
| Code          | <b>267133</b> | <b>267143</b> |
| Power (LED)   | 14W           | 14W           |
| Beam          | 10°           | 35°           |
| Delivered lms | 1049          | 1049          |

## APPROVALS





ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

DIMENSIONAL DIAGRAMS



150mm/6"

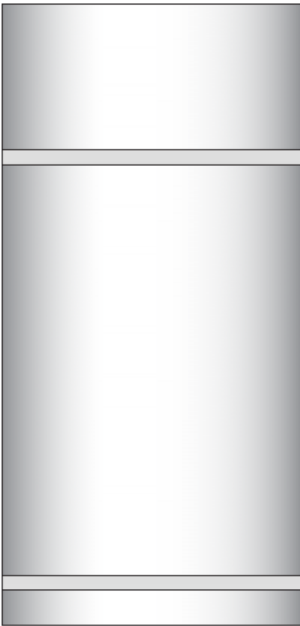

291mm/11.5"