






OOOOH™


FULL SPECIFICATION SHEET

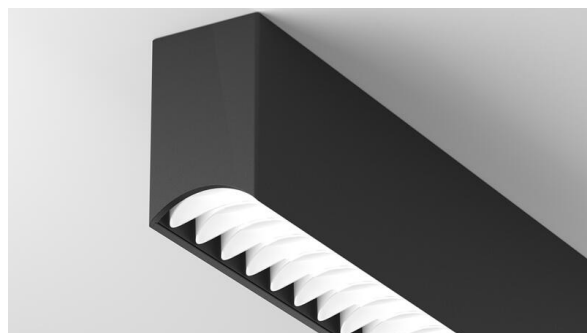

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

OOOOH dazzles up traditional linear lighting concepts with an innovative louver system. An array of ellipses is incurved to conform to a tunnel-shaped profile creating a subtle aesthetic and sublime lighting effect. The louver system not only tempers the starkness of the commonly exposed diffuser and adds an enchanting decorative feature, but also offers visual comfort by minimizing glare. Behind the louver system is either the Comfort diffuser which provides a softer and even distribution of light, or an asymmetric which skews the light for brightening up walls or adding to the ambient light. **OOOOH** presents a simple way to transform a functional light into a luxurious design feature.


2 OPTICS & FEATURES



Ceiling Direct




Direct DD1



Direct DD4



Bios



Declare



PoE



Tunable White

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

FINISH

Powder coated.

DRIVERS

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

MECHANICAL

Luminaires mount directly over J box (by others).

RGBW

RGBW available, consult factory.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 1300 lumens/ft (4300 lumens/m)

WOOD SLAT CEILING

For wood slat ceiling integration, consult factory.

DESIGNED BY

Serge Cornelissen.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

LENS

Opal acrylic. 2.4" width.

BIOS

For circadian lighting, consult factory.

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

FIXTURE LENGTHS

Available in 1" increments. Contact the factory for details.

ESTIMATED L70 @25°C (77°F)

> 165,000 hrs @ 1300 lumens/ft (4300 lumens/m)

APPROVALS

Damp Rated.

DESIGN

US Pat. No. D969,395.

5 DESIGN OPTIONS

LOUVER



Black



White



Satin
Chrome



Satin Gold




Satin
Champagne


FINISH



White -
Textured



Black
Metallic -
Textured




Silver
Metallic -
Textured



Gold Metallic
- Textured




Wood grain
- Light
Cherry ¹



Wood grain
- Dark
Walnut ¹




Wood grain
- White Oak
¹



Midnight
Blue Metallic
- Textured




Copper
Metallic



Charcoal
Metallic -
Textured



Bronze
Metallic -
Textured



Champagne
Metallic



Red Metallic
- Textured

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 HOW TO ORDER

LUMINAIRE

HLNC1C Direct, 4300 lm/m

All data shown at max values based on diffused light diffuser and white louver. Consult Performance Data download page for more detail. One power cord for every 153 linear meters.

LENGTH OF RUN

Length of run is 1219.2, 1829.8, 2438.4, 3048mm or 3657.6mm only, not available as a continuous run. For 152mm increments, consult factory.

SFB _ _ _ _ _

LENGTH

SL04 1219.2mm
SL06 1828.8mm
SL08 2438.4mm
SL10 3048.0mm
SL12 3657.6mm

LOUVER

LV2 Black
LV3 White
LV4 Satin Chrome
LV6 Satin Gold
LV9 Satin Champagne

LM/M LPF020 700 lm/m LPF030 1000 lm/m LPF040 1300 lm/m LPF050 1650 lm/m LPF060 2000 lm/m LPF070 2300 lm/m LPF080 2700 lm/m LPF100 3300 lm/m LPF120 4000 lm/m LPF130 4300 lm/m Lumens/m are determined by the color of the Louver. Consult website for available lumens/m based on selected louver.	CRI CR80 CRI 80+ CR90 CRI 90+	CCT CTA27 2700K CTA30 3000K CTA35 3500K CTA40 4000K CTA60 Tunable White ¹ ¹ Consult factory.	DIRECT LENS DD1 Asymmetric DD4 Comfort ¹ When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.
VOLTAGE V1 120/277V V2 240V ¹ V3 347V ² V4 Low Voltage ³ ¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.	DIMMING DA01 0-10V Dimming 1.0% DA02 0-10V Dimming 0.1% ¹ DA20 DALI Dimming 0.1% ¹ DA21 DALI Dimming 1.0% ¹ DA45 PoE ² ¹ Not available with V3. ² Only available with V4.	FIXTURE FINISH FA01 White - Textured FA02 Black Metallic - Textured FA20 Silver Metallic - Textured FA25 Gold Metallic - Textured FA27 Wood grain - Light Cherry ¹ FA28 Wood grain - Dark Walnut ¹ FA30 Wood grain - White Oak ¹ FA44 Midnight Blue Metallic - Textured FA45 Copper Metallic FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured ¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.	
QUANTITY OF EMERGENCY SECTIONS E0 Not required E1 Emergency system - Integral ¹ E3 Emergency generator circuit ¹ ¹ Not available with 347V.			

7 TECHNICAL DATA


LUMINAIRE

All data shown at max values based on diffused light diffuser and white louver. Consult Performance Data download page for more detail. One power cord for every 153 linear meters.

Code	HLNC1C
Light Direction	Direct
Lms/m	1300
Watts/M	13
LPW	128


8 PERFORMANCE DATA

**DIRECT COMFORT (DD4) -
WHITE LOUVER**




LUMEN/FT	WATT/FT	LPW
1300	13	106
1200	11	108
1000	9	110
800	7	114
700	6	115
600	5	117
500	4	119
400	3	121
300	3	126
200	2	128

**DIRECT COMFORT (DD4) -
BLACK LOUVER**




LUMEN/FT	WATT/FT	LPW
700	13	57
600	11	58
500	9	59
400	7	61
300	5	63
200	3	65

**DIRECT COMFORT (DD4) -
SATIN CHROME LOUVER**




LUMEN/FT	WATT/FT	LPW
1000	13	84
800	9	87
700	9	89
600	7	90
500	5	93
400	4	95
300	3	95
200	2	98

**DIRECT COMFORT (DD4) -
SATIN GOLD LOUVER**



LUMEN/FT	WATT/FT	LPW
1000	13	82
800	9	85
700	9	87
600	7	88
500	5	91
400	4	93
300	3	93
200	2	96


**DIRECT COMFORT (DD4) -
SATIN CHAMPAGNE LOUVER**



LUMEN/FT	WATT/FT	LPW
1000	13	84
800	9	87
700	9	89
600	7	90
500	5	93
400	4	95
300	3	95
200	2	98


9 TM-30 DATA

CCT 2700K

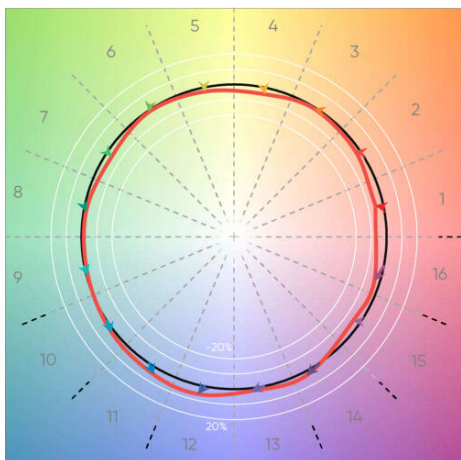


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

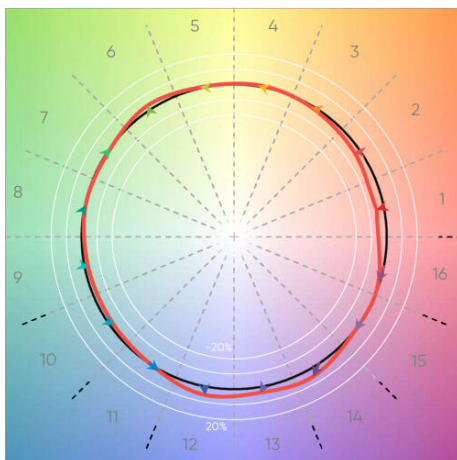


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

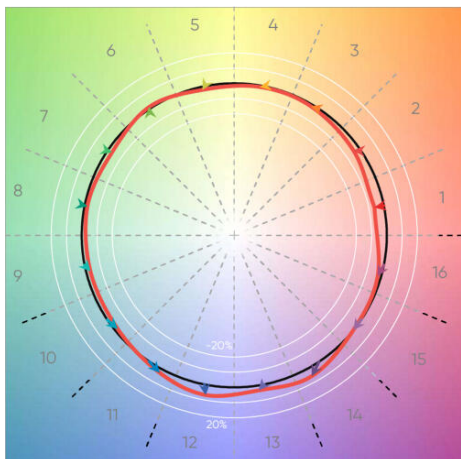


CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007

CCT 4000K

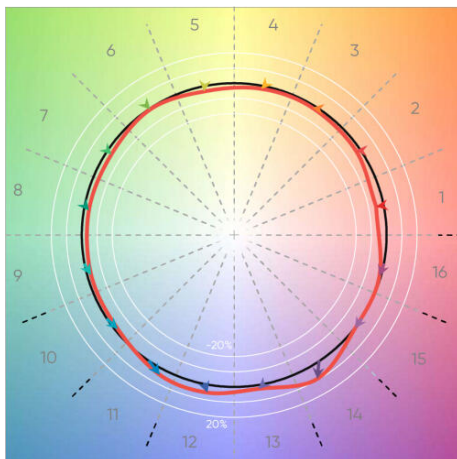

CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

10 DIMENSIONAL DIAGRAMS

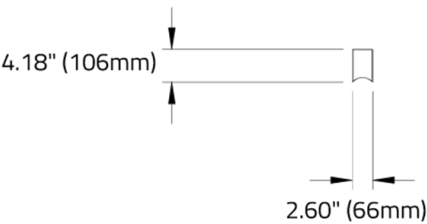

BOTTOM VIEW (LOUVER)

