


REUL™ - MODERN CLASSICS EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:



REUL™ - MODERN CLASSICS EXTERIOR

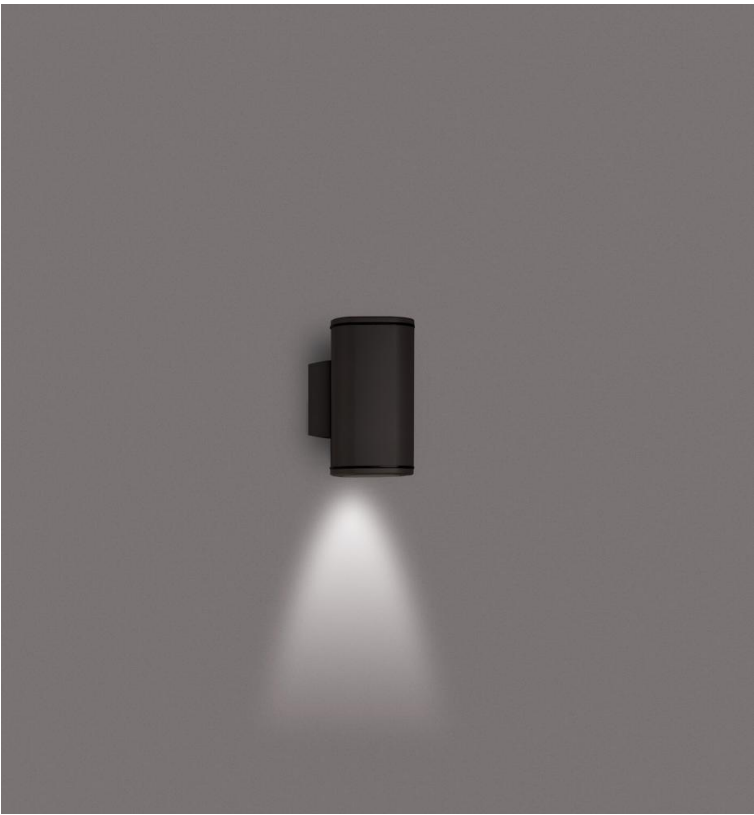

REUL™ - MODERN CLASSICS EXTERIOR

REUL is a facade light designed with a robust triangular aesthetic and engineered with exceptional power in both light output and optical control. 3 beam options are available ranging from 10° to 71°, for either direct or indirect light emission. An internal reflector ensures efficient light distribution allowing Reul to be mounted at higher elevations for wayfinding or to accent facade features.

GENERAL SPECIFICATION

Housing	External Screws
Die-cast and extruded aluminum.	Stainless steel.
Lens	Gaskets
Clear glass.	One piece silicone.
Reflector	Finish
High purity aluminum, semi-specular finish.	Double powder coated.
Drivers	Minimum Starting Temperature
HPF electronic drivers, 120/277V.	-20°C (-30°C for LEDs).
Mechanical	Delivered Lumens
Mounts directly over a junction box (by others). Mounting hardware (by others).	Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Ext-Wall Downlight Ext-Wall Up/Down

REUL™ - MODERN CLASSICS EXTERIOR

HOW TO ORDER

A. LUMINAIRE

232000 1 x 26W, 10°, 2826 lms	232001 1 x 26W, 28°, 2678 lms	232002 1 x 26W, 71°, 2439 lms	232010 1 x 32W, 10°, --- lms
232011 1 x 32W, 28°, 3849 lms	232012 1 x 32W, 71°, --- lms	232020 2 x 26W, 2 x 10°, 4221 lms	232021 2 x 26W, 2 x 28°, --- lms
232022 2 x 26W, 2 x 71°, 3904 lms			

B. CCT

30 3000K	40 4000K
-----------------	-----------------

C. FINISH

BL Black Metallic Textured	AG Anthracite Gray	GR Light Gray
-----------------------------------	---------------------------	----------------------

D. OPTIONS

DB Dimming 0-10V, 10% ¹

¹ Dimming is equal to or less than 10%.

TECHNICAL DATA

LUMINAIRE

Code	232000	232001	232002	232010	232011	232012
Power (LED)	1 x 26W	1 x 26W	1 x 26W	1 x 32W	1 x 32W	1 x 32W
Beam	10°	28°	71°	10°	28°	71°
Delivered lms	2826	2678	2439	---	3849	---
LPW	109	103	94	---	120	---
Length (A)	15.7"	15.7"	15.7"	15.7"	15.7"	15.7"

Code	232020	232021	232022
Power (LED)	2 x 26W	2 x 26W	2 x 26W
Beam	2 x 10°	2 x 28°	2 x 71°
Delivered lms	4221	---	3904
LPW	81	---	75
Length (A)	23.2"	23.2"	23.2"

FINISH



REUL™ - MODERN CLASSICS EXTERIOR

APPROVALS



REUL™ - MODERN CLASSICS EXTERIOR

DIMENSIONAL DIAGRAMS

