





SENTIS™


FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE




QUANTITIES


1 DESCRIPTION

SENTIS is a robustly designed transitional-style wall sconce, ideally suited for high-traffic zones. Available as a minimalist style with an exposed lens or with a decorative and protective grill in 3 finishes. The fixture also comes with the option of adding a perforated mesh (for TQ only) or a vertical bar (for OP & TQ only). Constructed with die-formed steel and die-cast zinc, using an opal acrylic halo lens, this is a durable and contemporary product that adds a traditional flair to various settings, especially hallways and corridors. This fixture beautifully combines modern minimalism with contemporary elegance to perfectly complement your space.

2 OPTICS & FEATURES



Wall Front/Back



General Diffuse



Declare

3 APPROVALS

ADA



CE



IP20

4 GENERAL SPECIFICATION

HOUSING

Die-formed steel.

HORIZONTAL BARS

Die-cast zinc.

PERFORATED ACCENTS

Steel, finished as specified.

MECHANICAL

Mounts directly to a standard electrical junction box (by others - North America only). Additional mounting points provided.
Mounting hardware (by others).

SENSORS

Consult factory regarding sensor compatibility.

REAR SIDE (HALO) LENS

Extruded opal acrylic.

DELIVERED LUMENS

Delivered lumens & LPW based on 3000K (min 80 CRI).

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement.
Contact the factory for maintenance documentation.

FINISH

Powder coated paint or plated.

DRIVERS

HPF electronic, 120-277V (EU-240V). 0-10V, 1% dimming standard.
The driver is integral to the fixture housing.

FRONT LENS

UV stabilized polycarbonate with vertical ribs.

UPPER AND LOWER DUST COVERS

Opal polycarbonate.

APPROVALS

Damp location, (Indoor use only).

5 DESIGN OPTIONS

FINISH



White



Silver
Metallic
Textured



Bronze
Metallic
Textured

6 HOW TO ORDER

LUMINAIRE	CRI	CCT	FASCIA
326100 14", 1311 lms 326102 18", 1865 lms 326104 24", 2592 lms 326106 36", 4333 lms 326108 48", 5523 lms	CR80 CRI 80+ CR90 CRI 90+	30 3000K 35 3500K 40 4000K	OP Style OP TQ Style TQ

FINISH	OPTIONS
WH White MS Silver Metallic Textured BM Bronze Metallic Textured	PM Perforated Mesh Accents (TQ only) VB Vertical Bar (OP & TQ only)

7 TECHNICAL DATA


LUMINAIRE

Code	326100	326102	326104	326106	326108
Power (LED)	14W	20W	28W	47W	59W
Delivered lms	1311	1865	2592	4333	5523
LPW	93	95	94	92	94
Type (A)	14"	18"	24"		
Type (B)				36"	48"


8 DIMENSIONAL DIAGRAMS

Style OP

Style OP

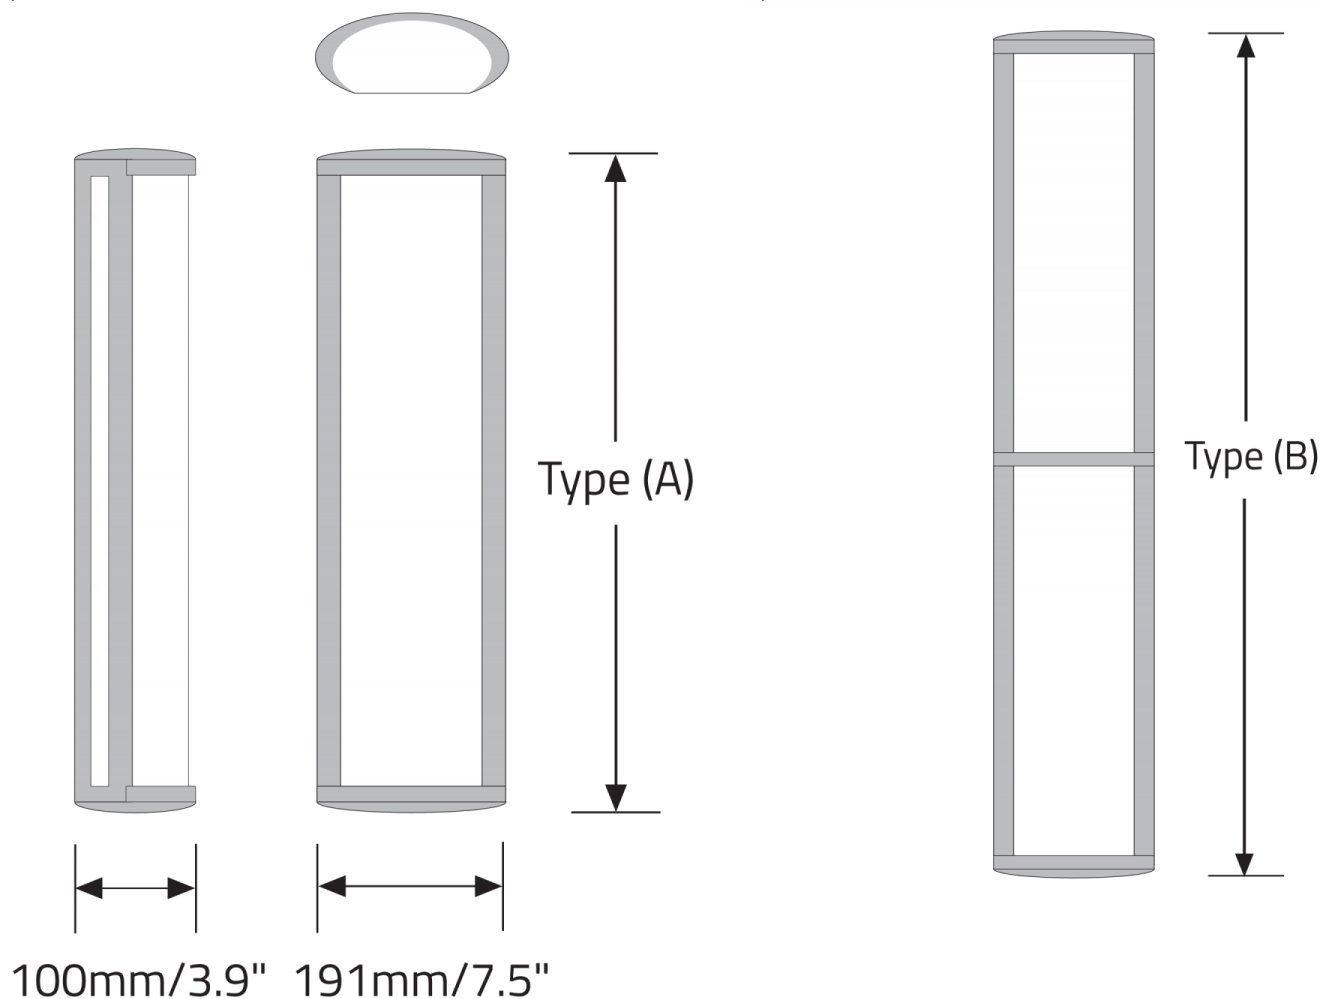

Style TQ

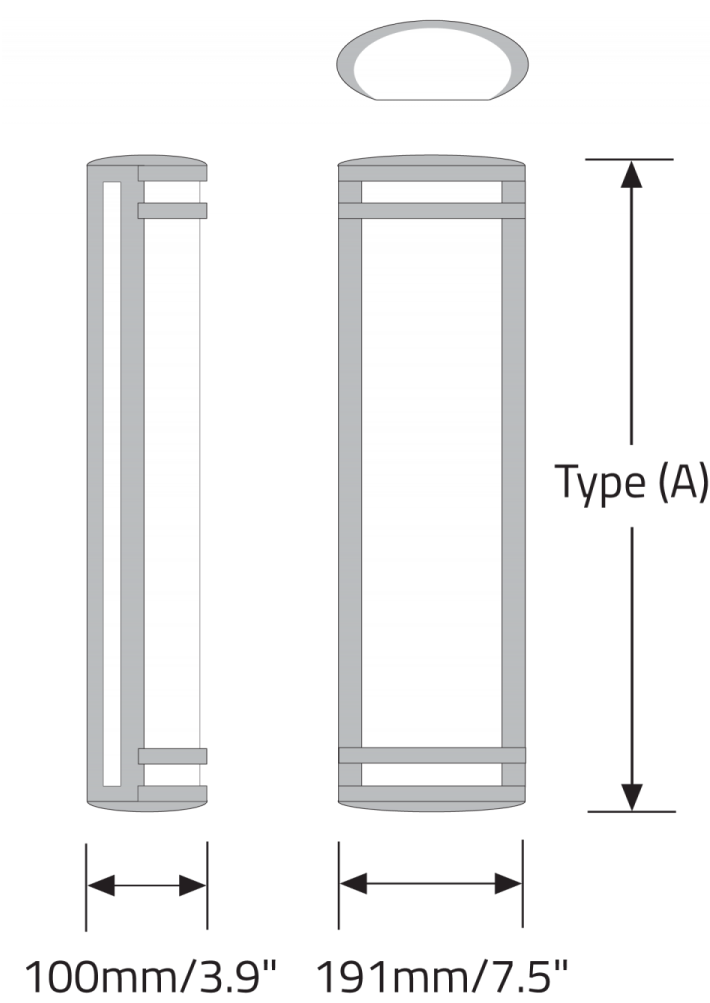

Style TQ

