






TIMPANI SQ™


FULL SPECIFICATION SHEET

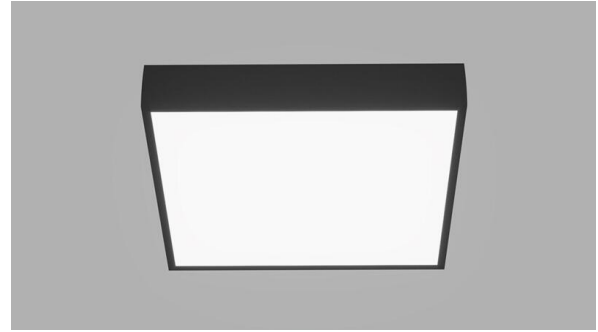

FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. **TIMPANI SQ** can now integrate into your data network via Power over Ethernet (PoE) connectivity. With 10 finish options, multiple sizes, and a range of lumen packages, **TIMPANI SQ** can be tailored to achieve the perfect illumination for any environment.


2 OPTICS & FEATURES



Ceiling



Direct



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Aluminum.

FINISH

Powder coated.

LENS

Opal polycarbonate

REPORTED L70 @25°C(77°F)

> 50,000 hrs.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

DRIVERS

Integral, HPF electronic drivers for 120–277V (EU–240V). The driver is integral to the fixture housing.

POE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

MECHANICAL

Luminaires mount directly over J box (by others – North America only).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

SUSTAINABILITY


Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FINISH




White



Black
Metallic
Textured



Silver
Metallic
Textured




Midnight
Blue Metallic
– Textured



Gold Metallic
– Textured



Copper
Metallic




Charcoal
Metallic –
Textured



Bronze
Metallic –
Textured



Champagne
Metallic



Red Metallic
– Textured

6 HOW TO ORDER

LUMINAIRE 973320 24", 4991 lms 973330 36", 13279 lms 973340 48", 25532 lms	CCT 30 3000K (min 80 CRI) 35 3500K (min 80 CRI) 40 4000K (min 80 CRI)	FINISH WH White BL Black Metallic Textured MS Silver Metallic Textured FA44 Midnight Blue Metallic - Textured FA25 Gold Metallic - Textured FA45 Copper Metallic FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured	
LUMEN & WATTAGE REDUCTION PRO Lumen & Wattage Reduction to approximately 25% of standard output PR1 Lumen & Wattage Reduction to approximately 50% of standard output PR2 Lumen Wattage & Reduction to approximately 75% of standard output Note: Custom Reduction Percentages Available Upon Request.	DIMMING OPTIONS D1 0-10V Dimming 1% D2 0-10V Dimming 0.1% ¹ DL DALI Dimming 1% DS DSI (EU only) ² SD SwitchDim (EU only) ² DE PoE ³ 0-10V, 1% dimming standard. ¹ Available with 24" (610mm) diameters only. ² DS & SD options not available in North America. ³ DE must be used with EV only.	OPTIONAL LOW VOLTAGE EV Low Voltage To be used with DE only.	

7 TECHNICAL DATA

LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152

8 DIMENSIONAL DIAGRAMS

