



WRAP TQ™ - MODERN CLASSICS EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:

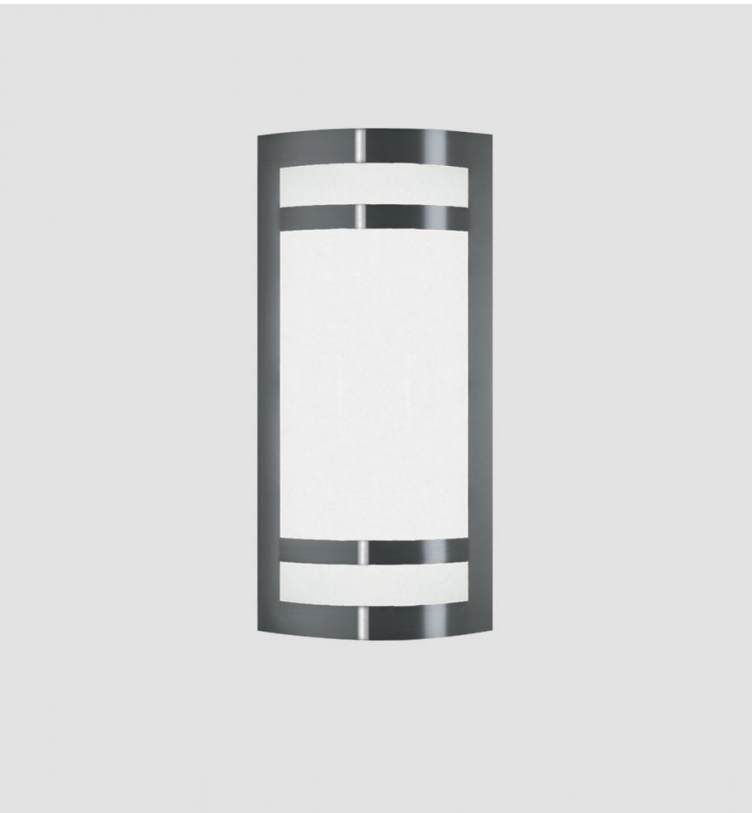

WRAP TQ™ - MODERN CLASSICS EXTERIOR

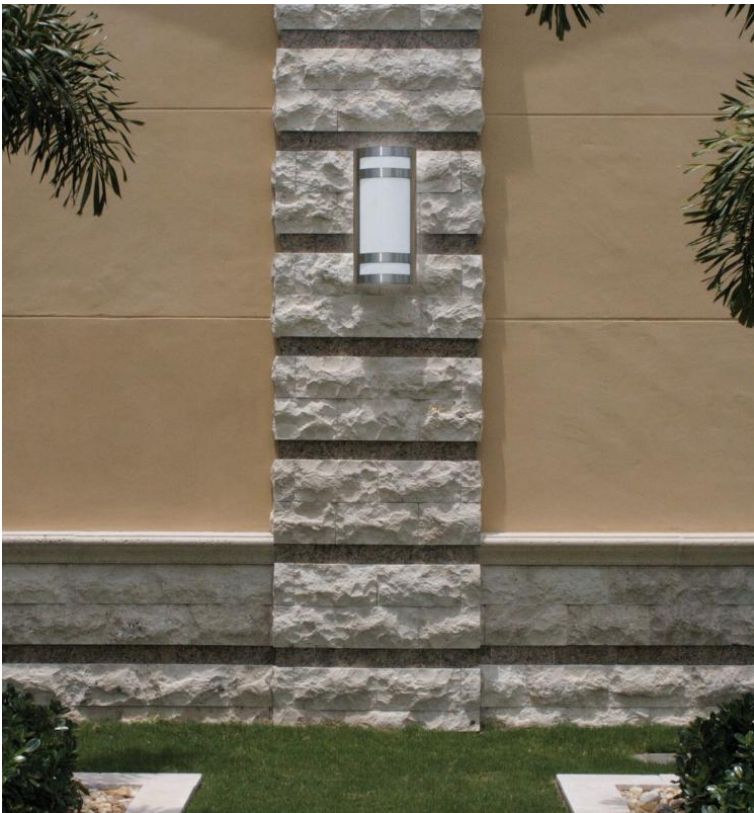

WRAP TQ™ - MODERN CLASSICS EXTERIOR

A facade light with a curved acrylic diffuser and stainless steel frame provides excellent general illumination for high-traffic pedestrian areas. Alternative finishes include Black, Bronze Metallic, and Silver Metallic.

GENERAL SPECIFICATION

Cover

Stainless steel.

Finish

Various as listed.

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Main body

Steel and cast aluminium. Body retained by stainless steel screws.

Lens

Opal acrylic.

Drivers

HPF, electronic, 120/277V (EU-240V), 0-10V, equal to or less than 10% dimming standard.

Minimum Starting Temperature

-25 °C.

OPTICS & FEATURES



Ext-Wall Front/Back

General Diffuse

WRAP TQ™ - MODERN CLASSICS EXTERIOR

HOW TO ORDER

A. LUMINAIRE

312103 17" Height, 16W, 501 lms	312261 26" Height, 16W, 1117 lms	312263 26" Height, 28W, 1927 lms	312265 50" Height, 28W, 1928 lms
312267 50" Height, 56W, 3755 lms			

B. CCT

30 3000K (min 80 CRI)	35 3500K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

C. FINISH

BL Black Metallic Textured	MS Silver Metallic Textured	BM Bronze Metallic Textured	SS Stainless Steel
-----------------------------------	------------------------------------	------------------------------------	---------------------------

D. OPTIONS

RE Remote Emergency System (max distance 25ft, 120/277V)


Dimming is not available when using RE (Remote Emergency)

TECHNICAL DATA

LUMINAIRE

Code	312103	312261	312263	312265	312267
Power (LED)	16W	16W	28W	28W	56W
Delivered lms	501	1117	1927	1928	3755
LPW	32	73	71	71	69
Height (A)	17"	26"	26"	50"	50"
Width (B)	11"	12"	12"	12"	12"

FINISH

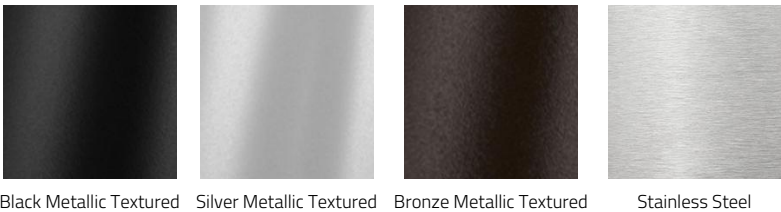

APPROVALS



WRAP TQ™ - MODERN CLASSICS EXTERIOR

DIMENSIONAL DIAGRAMS

