

1 IMPORTANT NOTE

Fixture comes partially assembled.


⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 DRIVER REPLACEMENT INSTRUCTION



STEP 1

Remove the diffuser(s) with the assistance of a flat head screwdriver for easier removal.

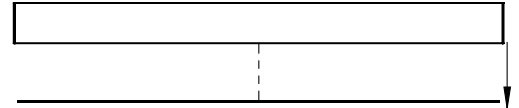


STEP 2

Unscrew the Reflector screws and remove the reflector(s) by inserting a flat head screwdriver into the opening slot and then pulling it off.

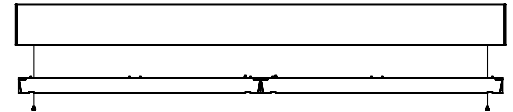


STEP 3

Disconnect wiring from the driver.

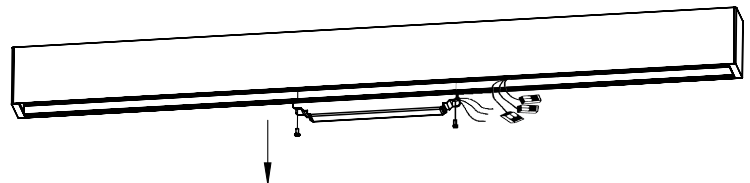

STEP 4

Detach the driver from the fixture by unscrewing it. Swap out the driver and re-make wiring connections.

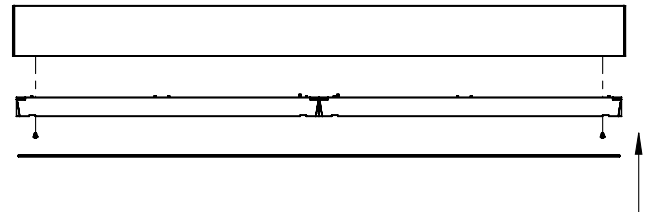


STEP 5

Re-install diffuser(s) and reflector(s).

3 LED REPLACEMENT INSTRUCTION


STEP 1

Remove the diffuser(s) with the assistance of a flat head screwdriver for easier removal.

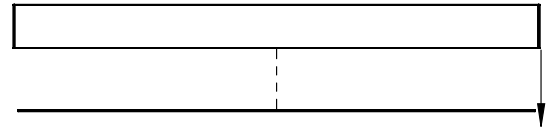



STEP 2

Unscrew the Reflector screws and remove the reflector(s) by inserting a flat head screwdriver into the opening slot and then pulling it off.

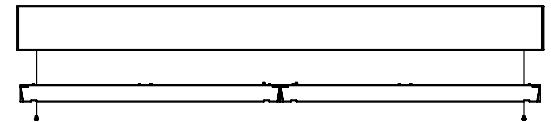


STEP 3

Disconnect wiring between reflector and fixture.

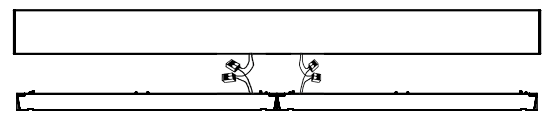


STEP 4

Replace the LED board by pushing the clips together to de-tach the LED and the reflector from each other.

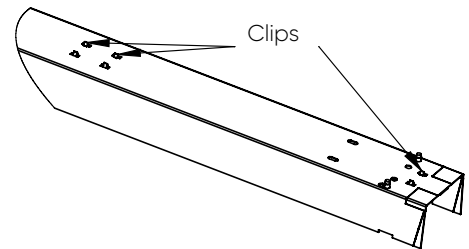

STEP 5

Re-attach clips to the reflector and re-make wiring connections to the LED board.

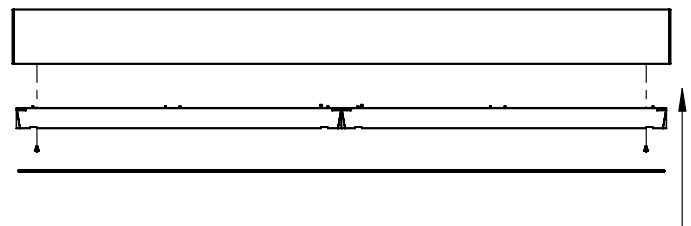

STEP 6

Re-install diffuser(s) and reflector(s).